

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Flat

Stafford County, Sec. 24 Twp. 22 Rge. 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NW cor. SE 1/4 (10 A. Loc.)
Lease Owner Black-Marshall Oil Company
Lease Name Geisler Well No. 1
Office Address Great Bend,
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 9-11-43 19
Application for plugging filed 9-11-43 19
Application for plugging approved 9-11-43 19
Plugging commenced 9-11-43 19
Plugging completed 9-11-43 19
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Alexander
Producing formation Depth to top Bottom Total Depth of Well 3690 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Well drilled with rotary				8 1/4	281	None
				Cemented bottom to top		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

The hole was filled with heavy mud from 3690' to 281' and bridged at 281 feet and cement to 236 feet (15 sacks) and mud and bridge to 26 feet and cement to six (6) feet and mud and cement to surface.

9-27-43

FILE 24 22-13W
BOOK PAGE 9-1-13-7

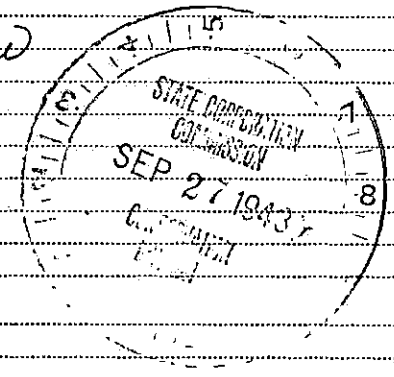

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to
Address

STATE OF Kansas, COUNTY OF Sedgwick, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
809 Petroleum Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of September, 1943.

My commission expires December 6, 1945

[Signature]
Notary Public.

COMPANY: Black-Marshall Oil Co.
 CONTRACTOR: Tri-State Drilling Co., Inc.
 FARM: Geisler Well No. 1

LOCATION: c NW 40 Acres SE/4
 Section 24-22-13W
 Stafford County, Kansas

COMMENCED: August 29, 1943
 COMPLETED: September 11, 1943

CASING RECORD:
 8-5/8" 281' - 135 sacks

ELEVATION: 1880'
 PRODUCTION: D & A

FORMATION	DEPTH		
Surface sand & clay	60	Top of Topeka	3030
Sand	215	Top of Kansas City	3387
Red bed & shells	281		
Red rock-Shale-Shells	360	Cored	3735 - 3746
Red rock	740		
Red bed-Shale & shells	1025	Cored	3746 - 3748
Shale - shells	1220		
Shale - salt	1325		
Shale & shells	1530		
Anhydrite	1675		
Anhydrite - shale	1745		
Sandy lime (sharp)	1790		
Lime & shale	1890		
Shale & shells	1925		
Sandy lime, broken	1970		
Sandy lime	2035		
Lime & shale	2420		
Shale & shells	2645		
Sandy lime - shale	2677		
Shale - lime	2780		
Lime & shale	2910		
Lime (Topeka)	3030		
Chert & lime	3050		
Lime and shale	3105		
Lime, broksn	3150		
Lime	3215		
Lime & shale	3305		
Shale & lime	3370		
Lime and shale	3387		
Lime	3610		
Shale - lime	3625		
Cherty lime - shale	3645		
Cherty lime	3675		
Cherty lime & shale	3720		
Green shale - sand	3735		
Sand, slight show oil	3736 $\frac{1}{2}$		
Green shale	3748		
Sandy shale	3762		
Lime	3790		
TOTAL DEPTH	3790		

I hereby certify this to be a correct and accurate log of the above described well as shown by the drilling reports.

Subscribed and sworn to before me this 24th day of September, 1943

M. G. Johnson

Jay English
 Notary Public

My Commission expires November 1, 1945

24-22-13W
 91 7