



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION

NOV 9 1964
11-9-64
CONSERVATION DIVISION
Wichita, Kansas

J. P. Roberts
Assistant Director
500 Insurance Building
212 North Market
Wichita 2, Kansas

Dear Sir:

Mr. Spradin of Petro-Cap & Bud Spradin has this

date requested permission to plug the following described well:

Mr. Spradin guarantees payment of the plugging fee.

Operator's full Name: Petro-Cap & Bud Spradin

Complete Address: 312 Union Center. Wichita, Kansas

Lease Name: Wieland Well No. # B-1

Location: ~~G-NE-SW~~ C SWNW Sec. 16 Twp. 21S Rge. 22 (W)

County Hodgeman Total Depth 4405 Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Spradin was instructed to plug the well as follows:

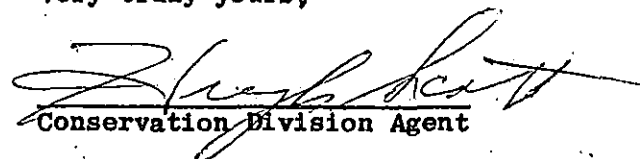
8 5/8"-285' Circulated w/cement.

Mud 4405' to 600' Spotted 25 Sax. cement 600' to 525'

Mud 525' to 275' Spotted 25 Sax. cement 275' to 200'

Mud 200' to 40' Plug. Hulls, 10 Sax. cement 40' to 0

Very truly yours,


Conservation Division Agent