

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Haskell  
~~Barber~~

County. Sec. 5 Twp. 30S Rge. 34 (E)  (W)

Location as "NE/CNW/SW" or footage from lines C NW NW

Lease Owner Mallonee-Coppinger Operations, Inc.

Lease Name Rooney Well No. 2

Office Address 1207 Union National Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 20 1966

Application for plugging filed May 26 (oral permission 5/21) 1966

Application for plugging approved May 26 1966


Plugging commenced May 21 1966

Plugging completed May 21 1966

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

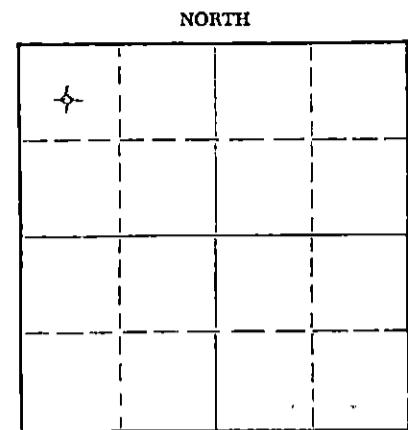

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well E. Eves

Producing formation None Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet

Show depth and thickness of all water, oil and gas formations.

**OIL, GAS OR WATER RECORDS**

**CASING RECORD**

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	809'	--

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set 35 sax Plug 700' to 600'

Set 15 sax Plug 45' to 0' By Halliburton

Finish 6:30 P.M. 5/21/66

**RECEIVED**  
STATE CORPORATION COMMISSION

JUN - 3 1966

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Mahoney Drilling Company, Inc.

Address Box 1257, Liberal, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

W. J. Coppinger (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. J. Coppinger

1207 Union National Building, Wichita, Kans.

(Address)

SUBSCRIBED AND SWORN to before me this Second day of June, 1966

My commission expires April 23, 1968

Leola Lynskey  
Leola Lynskey

Notary Public.

15.081.30079.00.00

Rooney # 2  
C NW NW  
Section 5-30S-34W  
Haskell, K County, Kansas

Set 8-5/8" 20# Csg. @809KB 625 Sx Cement  
Cement Circulated.  
Set Plug 35 Sx Cement @700 to 600'  
Set Plug 15 Sx Cement 45' to 0'

Surface Sand	0-70
Sand & Red Bed	70-695
Red Bed	695-811
Red Bed & Anhydrite	811-1230
Sand & Anhydrite	1230-1860
Anhydrite	1860-2602
Lime Shale	2602-3682
Lime & Chalk	3682-3786
Lime Shale	3786-4166
Lime	4166-4939
Lime & Shale	4939-5296
Lime-Shale-Sand	5296-5387
Lime-Shale	5387-5558
Lime-Sand	5558-5649
Lime	5649-5740
TD	5740

This is a true and exact copy of the formation taken  
From the Daily Drilling Reports

T. W. Mahoney  
T. W. Mahoney, President

State of Kansas  
County of Seward

Sworn to ~~and signed~~ before me this 24 Day of May, 1966

George W. Carnahan, Jr.  
George W. Carnahan, Jr.  
Notary Public

MY Commission Expires January 24, 1968

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 26 1966  
CONSERVATION DIVISION  
Wichita, Kansas