

STATE OF KANSAS
STATE CORPORATION COMMISSION

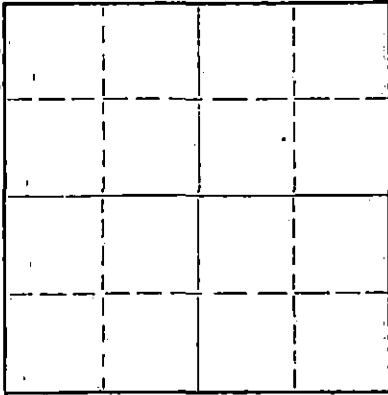
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

15.083.30095.00.00

Form CP-4

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Hodgeman County. Sec. 19 Twp. 21S Rge. (E) 24 (W)
Location as "NE/CNW/SW" or footage from lines C/SE NW/4
Lease Owner Strata Drilling, Inc.
Lease Name Witman Well No. 1
Office Address P. O. Box 355, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 13 19 66
Application for plugging filed August 13 19 66
Application for plugging approved August 13 19 66
Plugging commenced August 13 19 66
Plugging completed August 13 19 66
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves, Sublette, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4525' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	265'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged hole as follows: Plugged at 600' with 30 sacks of cement ; plugged at 260' with 20 sacks of cement and mud to 40'; plugged at 40' with 10 sacks of cement. 2 sacks of cement in rat hole and 2 sacks of cement in mouse hole. Plug down at 8:30 P. M. August 13, 1966.

RECEIVED
STATE CORPORATION COMMISSION

AUG 19 1966

8-19-66

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling, Inc.
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.

Jim B. McWilliams (employee of owner) or (SUPERVISOR) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jim B. McWilliams, Secy-Treas.
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of August, 19 66

My commission expires

December 14, 1969

Elaine H. Taylor

Notary Public.

RECEIVED

AUG 19 1966

15.083.30095.00.00

D R I L L E R S L O G

#1 Witman

CASING RECORD: 256.62' of used 8-5/8" surface casing.	COMPANY: Strata Drilling, Inc.	DESCRIPTION: C/SE NW/4 Section 19-21S-24W Hodgeman County, Kansas
TOTAL DEPTH: 4525'	CONTRACTOR: Strata Drilling, Inc.	ELEVATION: 2376' RB 2371' GL
	COMMENCED: August 3, 1966	
	COMPLETED: August 13, 1966	

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Rock	0	140	Ran 256.62' of used 8-5/8" surface casing; set and cemented at 265' with 185 sacks of regular cement, 2% gel and 3% calcium chloride. Plug down at 10:30 P. M. August 3, 1966. Cement circulated.
Shale	140	560	
Clay & Red Bed	560	1640	
Shale & Red Bed	1640	2260	
Lime & Shale	2260	3495	
Lime, Shale & Chalk	3495	3779	
Lime	3779	4505	
Lime & Shale	4505	4525	
Total Depth	4525'		Ran two drill stem tests.

Ran Electra log.


D. & A.

Plugged hole as follows: Plugged at 600' with 30 sacks of cement; plugged at 260' with 20 sacks of cement and mud to 40'; plugged at 40' with 10 sacks of cement. 2 sacks of cement in rat hole and 2 sacks of cement in mouse hole. Plug down at 8:30 P. M. August 13, 1966.


STATE OF KANSAS)
) ss.
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.


Jim B. McWilliams, Secy-Treas.

Subscribed and sworn to before me this 16th day of August, 1966.


Elaine H. Taylor, Notary Public

My Commission Expires:
December 14, 1969