


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH

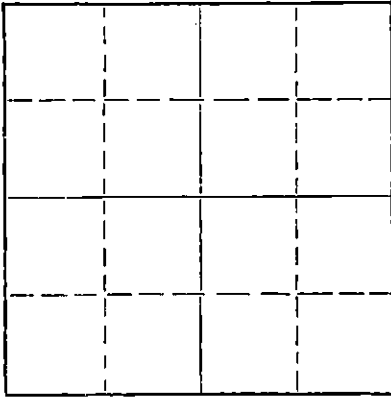

Locate well correctly on above  
Section Plat

Reno County. Sec. 30 Twp. 22 Rge. 9 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines 990' S. & 990' W. of Cen. Sec.  
Lease Owner Cities Service Oil Company, et al.  
Lease Name Peace Creek Unit, Tract 1 Well No. 4  
Office Address Box 144, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well  
Date well completed August 15 19 42  
Application for plugging filed August 15 19 58  
Application for plugging approved August 18 19 58  
Plugging commenced September 12 19 58  
Plugging completed September 20 19 58  
Reason for abandonment of well or producing formation Depleted formation

If a producing well is abandoned, date of last production February 7 19 58  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel  
Producing formation Viola Depth to top 3669 Bottom 3675 Total Depth of Well 3675 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	279'	None
				5-1/2"	3669'	1632'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

3675-3650', river sand.  
3650-3610', 5 sacks cement  
3610- 260', heavy mud pumped in by service company  
260- 190', rock bridge and 20 sacks cement  
190- 35', heavy mud.  
35' to base of cellar, rock bridge and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor C. E. Shull Casing Pulling Company  
Address Great Bend, Kansas

9-26-58

STATE OF Kansas, COUNTY OF Barton, ss.  
V. M. Conover (employee of owner) or owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover

Box 144, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 25th day of September, 19 58.

My commission expires March 12, 1959.

W. D. Smith

SEP 26 1958  
Conservation Division  
Wichita, Kansas

PLUGGING  
FILE SEC. 30 T. 22 R. 9W  
BOOK PAGE 123 LINE 22

15-155-03210-0000

Peace Creek Unit

WELL - J. C. SMISOR #1 (Tract #1)

Total Depth	3,675 feet
Spudded	7-25-42
Complete	8-15-42
Surface Casing	8 5/8" 24# Lupweld @ 279' w/200 sx
Production Casing	5 1/2" 14# Seamless @ 3669' w/200 sx
Initial Production	201 BOPD by pump
Top Producing Formation	3,669 feet
Bottom Producing Formation	3,675 feet
Elevation	1,733 feet ground 1,735 feet derrick floor
Remedial work	None

STATE COURT

AUG 10 1942

CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING

FILE SEC 30 T 22 R 9W

BOOK PAGE 123 LINE 22