


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

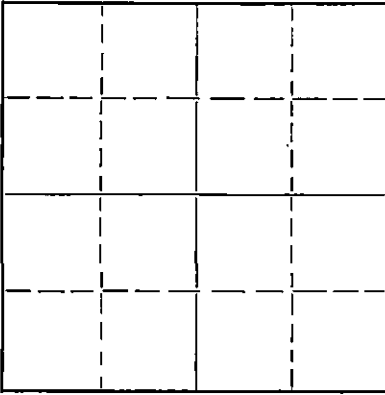

Locate well correctly on above
Section Plat

Reno County, Sec. 30 Twp. 22 Rge. 9 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW SW SE
Lease Owner PICKRELL DRLG. CO., INC., ET AL
Lease Name LESLIE Well No. 1
Office Address 705 Fourth Natl Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well Abandoned
Date well completed 5/3 1949
Application for plugging filed 1/17 19 51
Application for plugging approved 1/17 19 51
Plugging commenced 1/20 19 51
Plugging completed 1/25 19 51
Reason for abandonment of well or producing formation formation depleted.
If a producing well is abandoned, date of last production 1/10/51 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Viola Depth to top 3675 Bottom 3706 Total Depth of Well 3706 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	306	None
				5 1/2"	3681	3160

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole plugged back from 3706' to 3670' with crushed rock, dump 6 sax cement to 3624. Shoot casing off at 3160', pulled pipe. Filled hole with heavy mud to 250', set rock bridge, dump 15 sax cement on bridge, fill hole to 20' of top. Dump 5 sax cement to bottom of callar.

3-23-51

RECEIVED
STATE CORPORATION COMMISSION
MAR 23 1951
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to PICKRELL DRILLING COMPANY, INC.
Address 705 Fourth National Bank Bldg., Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. W. Sebitts (Employee of owner) or (Operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) *C. W. Sebitts*
705 4th Natl Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of March, 19 51

Ethel Zimmerman
Notary Public.

My commission expires January 28, 1953

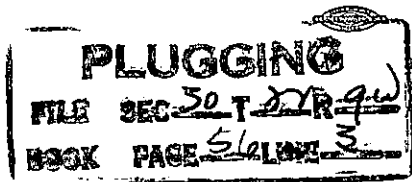

LOG

COMPANY: PICKRELL DRILLING COMPANY, INC. et al. Rotary Drilling Commenced: 4/16/49
 Wichita, Kansas Rotary Drilling Completed: 9/1/49

CONTRACTOR: COPPINGER & GOURNIEUR
 Wichita, Kansas

LOCATION: LITTLE #1, NE 1/4 SW 20-221-20
 Reno County, Kansas

CASING RECORD: 305' of 3 5/8" surface casing, cemented with 150 sacks
 bulk cement.

5 1/2" at 3681' cemented with 75 sacks cement. (114 joints).

ROTARY DRILLER'S LOG

Sand	815
Hard Soil	850
Shale & Shells	930
Silt	1000
Shale & Shells	1350
Shale	1380
Lime	2320
Shale	2450
Lime & Shale	2760
Lime	3075
Rotary Total depth	3681

GEOLOGICAL LOG

Elevation	1723
Top Lansing-Hamden City	3194 - 1460
Viola	3075 - 1917
Total Depth	3681

CABLE TOOL LOG

Viola Lime 3681 to 3706 ft

Small flow of oil and 2 barrel water per hour - 3680' - 3700', water increasing to 6 barrel per hour at 3702'.

Hard lime from 3703' to 3703'.

Soft lime 3703' to 3706' with lots of free oil.

Covered formation from 3706' to 3701 1/2' with Gelsol. Squared hole from 3698' to 3701 1/2' with 50 sacks of cement. Drilled out cement to total depth, 3706' and had only a little free oil. Acidized with 2,000 gallons of acid and well made 6 barrel oil and 12 barrel water per hour on 3 hour sand test. Put on pump.

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 16 1951
 CONSERVATION
 Wichita

PLUGGING
 FILE SEC-301-VV-29W
 BOOK PAGE 56 LINE 3