


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

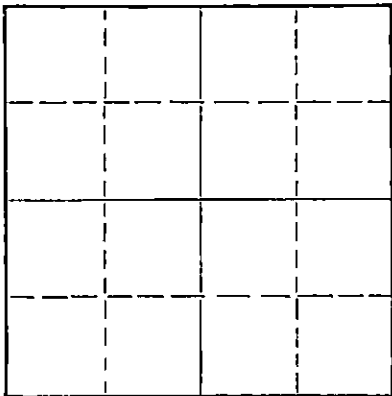

Locate well correctly on above
Section Plat

Pawnee County. Sec. 10 Twp. 22 Rge. 15 (E) W (W)
Location as "NE/CNW/SW" or footage from lines C SW/4 SW/4 SW/4
Lease Owner Loffland Brothers Company
Lease Name W. T. Compton Well No. 1
Office Address Box 1649, Philtower Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 26 19 54
Application for plugging filed December 26 19 54
Application for plugging approved _____ 19 _____
Plugging commenced December 26 19 54
Plugging completed December 26 19 54
Reason for abandonment of well or producing formation Drilled as dry hole

If a producing well is abandoned, date of last production No 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren H. Horner
Producing formation Arbuckle Depth to top 3985 Bottom 3989 Total Depth of Well 3985 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mixed 1/3 sacks hulls, spooted @ 227' - pushed Halliburton top plug down with drill pipe to 227'.
Mixed 30 sacks common cement and cemented through drill pipe at 227'.
POH and set plug at 35' with 10 sacks common cement. Completed 11:30 a.m.

1-4-55

RECEIVED
STATE CORPORATION COMMISSION
JAN 4 - 1955
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Own Tools (If additional description is necessary, use BACK of this sheet)
Address _____

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.
Kenneth Davis, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth Davis Jr
Box 1649, Philtower Building, Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN to before me this 29th day of December, 19 54
Patricia E. Ludwick Notary Public.

My commission expires January 22, 1958

PLUGGING
FILE SEC 10 T 22 R 15W
BOOK PAGE 88 LINE 4

WELL LOG

Loffland Brothers Company W.T. Compton #1
C SW/4 SW/4 SW/4 Section 10-22-15W
Pawnee County, Kansas

0-41	Clay and sand
41-175	Sand
175-400	Shale and shells
400-485	Sand
485-820	Red bed
820-845	Sand
845-1059	Red bed and shale
1059-1480	Shale and shells
1480-1560	Salt and shale
1560-1887	Shale and shells
1887-2021	Lime
2021-3356	Shale and lime
3356-3404	Lime
3404-3560	Lime and shale
3560-3920	Lime
3920-3947	Chert and shale
3947-3989 TD	Sand and shale

Kenneth Davis

PLUGGING
 FILE SEC 10-22-15W
 BOOK PAGE 88 LINE 4