

STATE OF KANSAS CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

STAFFORD County. Sec. 29 Twp. 22 Rge. (E) 14 (W)

Location as "NE/CNW/SE/SW" or footage from lines SW NE NE

Lease Owner SANTA-FE PIPE & SUPPLY, INC.

Lease Name MC MILLAN Well No. 2

Office Address BOX 562 - GREAT BEND, KANSAS 67530

Character of Well (completed as Oil, Gas or Dry Hole) OIL

Date well completed FEBRUARY 23 19 69

Application for plugging filed AUGUST 28 19 69

Application for plugging approved AUGUST 29 19 69


Plugging commenced OCTOBER 13 19 69

Plugging completed OCTOBER 30 19 69

Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

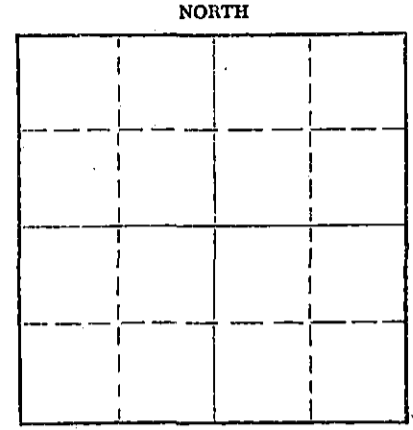

Name of Conservation Agent who supervised plugging of this well R. J. WARREN

Producing formation Depth to top Bottom Total Depth of Well 4021' Feet

Show depth and thickness of all water, oil and gas formations.

Table with columns: OIL, GAS OR WATER RECORDS and CASING RECORD. Includes rows for FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, and PULLED OUT.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- 4021' - 3750' - PLUG
3750' - 3630' - SAND
3630' - 3590' - 5 SACKS CEMENT
3590' - 225' - MUD
225' - BASE - PUMPED 10 SACKS OF GEL MUD AND 75 SACKS CEMENT

RECEIVED STATE CORPORATION COMMISSION DEC 10 1969 CONSERVATION DIVISION Wichita, Kansas

Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC. Address BOX 562 - GREAT BEND, KANSAS

STATE OF KANSAS COUNTY OF BARTON ss. T. L. NUTT

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt

BOX 562 - GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 9th day of DECEMBER, 19 69

Mary M. Guesnier Notary Public.

My commission expires JULY 31, 1970

COPY


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas

Company- WESTERN PETROLEUM COMPANY, INC.
 Farm- McMillan No. 2

SEC. 29 T. 22 R. 14W
 SW NE NE

Total Depth. 4021'
 Comm. 2-11-60 Comp. 2-23-60
 Shot or Treated.
 Contractor. Western Petroleum Co., Inc.
 Issued. 8-27-60

County Stafford
 KANSAS



Elevation. 1957' DF

Production. 45 BOPD

CASING:

8 5/8" @ 245' w/225 sks. cem.
 5 1/2" @ 3745' w/125 sks. cem.

Figures Indicate Bottom of Formations.

clay & sand	95
shale	345
sand	405
red bed & shale	885
Anhydrite	920
shale & shells	1700
lime	1940
lime & shale	3265
lime	3329
lime & chalk	3405
lime & shale	3515
lime	3820
lime & cherty	3862
chert	3895
chert & lime	3950
cherty lime	3985
Simpson shale	4016
shale-lime	4021
Total Depth	

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 29 1969
 CONSERVATION DIVISION
 Wichita, Kansas

SCOUT OPS:

Anhydrite	885
Heebner	3386
Brown Lime	3514
Lansing	3524
Base Kansas City	3750
Shaley Conglomerate	3791
Cherty Conglomerate	3816
Viola	3856
Simpson	3929
Arbuckle	4018