

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

15-155-19266-0000

FILE NO. 23-37

LOCATION CSH NW-NE

SEC. 31 TWP. 23 RGE. 10 W

Dry Hole Abandoned Oil Well ✓ Abandoned Gas Well

I have today completed supervision of plugging of:

Well No. 8 Lease Johnson

Operator Stanford Oil Address

Field Zenith County Reno.


Total Depth 3770 Feet.

(Describe briefly the manner in which the well was plugged)

13" @ 190. Circulated with Cement
5 1/2" @ 3758 - Perforated @ 3709'
mud to 3709 - 5 Sx Cement dumped @ 3709
Heavy mud to 190' - Wood plug - bridge &
25 Sx Cement @ 190 - mud & 20' Wood
plug - bridge & 15 Sx Cement to bottom
cellar -

Edon Perry
District Conservation Agent

Date 5-5-48

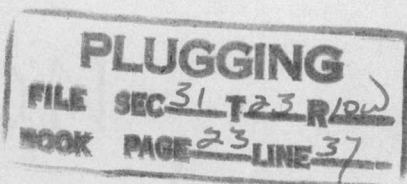

MAY 8 - 1948

5-8-48