

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-051-02764-00-00  
Spot: SESWNE Sec/Twnshp/Rge: 27-13S-17W  
2310 feet from N Section Line, 1650 feet from E Section Line  
Lease Name: GEIST Well #: 2  
County: ELLIS Total Vertical Depth: 3541 feet

Operator License No.: 5427 String Size Depth (ft) Pulled (ft) Comments  
Op Name: D. R. LAUCK OIL CO., INC. PROD 5.5 3512 150 SX  
Address: 344 S LAURA SURF 8.75 205 135 SX  
WICHITA, KS 67211

Well Type: OIL UIC Docket No: Date/Time to Plug: 01/11/2017 7:30 AM  
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC  
Proposal Rcvd. from: VERNON PFLUGHOEFT Company: D. R. LAUCK OIL CO., INC. DBA Phone: (620) 793-2713

Proposed Plugging Method: Ordered 465 sx 60/40 pozmix 4% gel cement w/800 # hulls.  
Arb: 3510' - 3541' OH.  
KC: 3320' - 3330'.  
Casing leaks at 2670' and above.  
Fluid level @ 735'.

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 01/11/2017 12:15 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Perf Tech shot holes at 1650', 1228' and 663'. Express Well Service ran in hole with tubing to 3510'. Copeland rigged to tubing and pumped 185 sx cement w/350 # hulls mixed in. Pulled tubing to 1650'. Copeland rigged to tubing and pumped 200 sx cement w/350 # hulls to circulate cement to pit area. Pulled tubing. Rigged to 5 1/2" casing with a swedge and pumped 70 sx cement w/50 psi. Shut in pressure 0 psi. Rigged to 8 5/8' surface casing and pumped 10 sx cement at 100 psi. Shut in pressure 100 psi.

GPS: 38.89410 -099.19365

Perfs:

Top	Bot	Thru	Comments
3320	3330		

KCC WICHITA  
JAN 24 2017  
RECEIVED

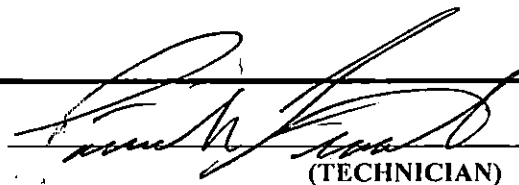
INVOICED  
JAN 24 2017

Remarks: COPELAND ACID AND CEMENTING TICKET # 44577

Plugged through: TBG

District: 04

Signed

  
(TECHNICIAN)

CM

JAN 12 2016