


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Pawnee County, Sec. 29 Twp 22 Rge. 15W (E) (W)

Location as "NE/CNWSW" or footage from lines S/2 N/2 SE/4  
 Lease Owner F & M Oil Co., Inc.  
 Lease Name Barstow Yeager Well No. 1  
 Office Address 603 Union Center Building, Wichita, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
 Date well completed August 7 1975  
 Application for plugging filed August 7 1975  
 Application for plugging approved August 7 1975  
 Plugging commenced August 7 1975  
 Plugging completed August 7 1975  
 Reason for abandonment of well or producing formation Dry Hole

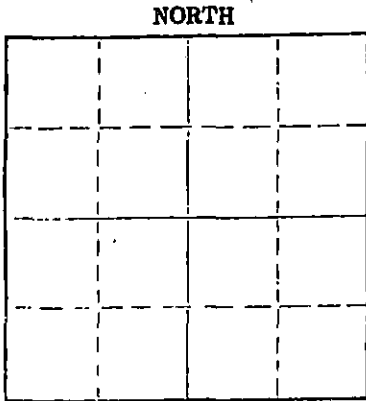

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4007 feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Bottom plug @ 560' w/40 sacks cement thru drill pipe.  
Top plug @ 40' w/1/2 sack hulls and 10 sacks cement  
2 sacks cement in rat hole. 8-11-75

RECEIVED  
 STATE CORPORATION COMMISSION

AUG 11 1975

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor Duke Drilling Co. CONSERVATION DIVISION  
 Address P. O. Bo x 823, Great Bend, Kansas 67530 Wichita, Kansas

STATE OF KANSAS COUNTY OF BARTON, ss.  
Leonard Williamson (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson  
P. O. Bo x 823, Great Bend, Kansas  
 (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of August, 19 75

My commission expires April 11, 1978  
Notary Public.

DRILLERS' WELL LOG

DATE COMMENCED: July 28, 1975  
 DATE COMPLETED: August 7, 1975

F & M Oil Co., Inc.  
 BARSTOW-YEAGER # 1  
 S/2 N/2 SE/4  
 Sec. 29-T22S-R15W  
 Pawnee County, Kansas

ELEVATION: 2007 K.B.

0 - 142'	Surface Soil, Clay and Sand
142 - 420'	Shale
420 - 495'	Sand
495 - 575'	Red Bed
575 - 954'	Shale and Red Bed
954 - 978'	Anhydrite
978 - 1240'	Shale, Red Bed
1240 - 2030'	Shale, Lime Streaks
2030 - 2290'	Lime and Shale
2290 - 2530'	Shale
2530 - 3428'	Lime and Shale
3428 - 3433'	Shale
3433 - 3448'	Lime and Shale
3448 - 3461'	Lime
3461 - 3546'	Shale
3546 - 3556'	Lime and Shale
3556 - 3795'	Lime
3795 - 3865'	Lime and Shale
3865 - 3900'	Shale, Lime, Chert & Sand
3900 - 3956'	Chert
3956 - 3999'	Shale
3999 - 4007'	Dolomite
4007'	RTD

FORMATION TOPS

Anhydrite	954
Heelner	3428
Tornoto	3448
Douglas	3461
Brown Lime	3546
Lansing K.C.	3556
Base K.C.	3795
Cong.	3865
Viola	3900
Simpson Shale	3956
Arbuckle	3999
RTD	4007

SURFACE PIPE:

Set 575' of 8 5/8", 28# used  
 pipe w/325 sacks Common, 2% Gal,  
 3% cc.

A F F I D A V I T

STATE OF KANSAS }  
 COUNTY OF BARTON } ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 8th day of August, 1975.

Alvin M. Haque  
 Notary Public

My Commission Expires: April 11, 1978

RECEIVED  
 STATE CORPORATION COMMISSION

AUG 11 1975

CONSERVATION DIVISION  
 Wichita, Kansas