


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

15-009 - 22016 - 0000

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barton County, Sec. 32 Twp. 16 Rge. 11 E/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines  
160' FNL & 1980' FEL NE/4  
Lease Owner Production, Inc.  
Lease Name Rous Well No. 1  
Office Address Box 459, Great Bend, Kansas 67530  
Character of Well (Completed as Oil, Gas or Dry Hole)

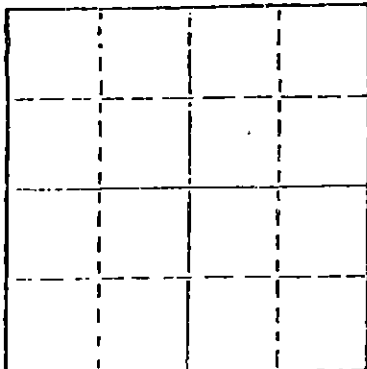

Locate well correctly on above  
Section Plat

Dry Hole  
Date Well completed Aug 12 19 80  
Application for plugging filed Aug 12 19 80  
Application for plugging approved Aug 12 19 80  
Plugging commenced Aug 12 19 80  
Plugging completed Aug 12 19 80  
Reason for abandonment of well or producing formation

D & A  
If a producing well is abandoned, date of last production 19.

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3364  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

First plug @ 500' w/40 sacks cement  
Second plug @ 300' w/25 sacks Cement  
Mud to 40' w/1/2 sack hulls bridge plug 10 sacks cement  
5 sacks cement in rat hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Mustang Drilling, Inc.


STATE OF KANSAS COUNTY OF BARTON, ss.  
Milford Martin (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Box 1425, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of October, 19 80

My commission expires



Beverly Shewbart Notary Public.

10-17-80  
RECEIVED  
STATE CORPORATION COMMISSION  
OCT 17 1980  
CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS' WELL LOG

DATE COMMENCED: August 6, 1980  
DATE COMPLETED: August 12, 1980

Production, Inc.  
ROUS # 1  
160' FNL & 1980' FEL NE/4  
Sec 32-T16-R11W  
Barton County, Kansas

0 - 190' Post Rock, Shale  
190 - 305' Red Bed  
305 - 320' Shale  
320 - 740' Shale, Red Bed  
740 - 1410' Shale  
1410 - 2695' Shale, Lime  
2695 - 3055' Lime, Shale  
3055 - 3160' Lime  
3160 - 3300' Lime, Shale  
3300 - 3341' Shale, Lime  
3341 - 3364' Dolomite  
3364' RTD

Anhydrite 744'

SURFACE PIPE:  
Set used 8 5/8", 24# pipe  
@ 313' w/175 sacks Common  
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS )  
COUNTY OF BARTON ) ss.

I, Milford Martin, of Mustang Drilling, Inc. state that I have knowledge of the facts, statements and matters herein contained and that the same are true and correct to the best of my knowledge.

*Milford Martin*  
Milford Martin

Subscribed and sworn to before me this 15th day of August, 1980.

BEVERLY SHEWBART  
Barton County, Kansas  
My Comm. Exp. April 17, 1982

*Beverly Shewbart*  
Notary Public

My Commission Expires April 17, 1982

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 19 1980  
CONSERVATION DIVISION  
Wichita, Kansas