


15-167-05790-0000
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Russell County. Sec. 24²⁵ Twp. 11 Rge. 15 (E) (W)
Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Spector Pipe and Supply Inc.
Lease Name Harbaugh Well No. 2
Office Address Box 169, Russell, Kans.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 9-23-51 19____
Application for plugging filed 7-26-66 19____
Application for plugging approved 7-27-66 19____
Plugging commenced October 8, 1966 19____
Plugging completed October 11, 1966 19____
Reason for abandonment of well or producing formation Depleted

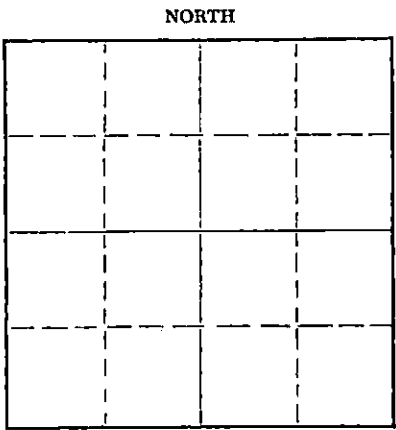

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation Gorham Depth to top 3200' Bottom 3200 1/2' Total Depth of Well 3201 1/2' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	812' ft.	none
				5 1/2"	3200 1/2'	2580.59'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 2900 feet and dumped 5 sacks of cement. Mudded hole to 315 feet. Set Rock Bridge and finished filling hole with ready-mix cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 19 1966
10-16-66
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Co. 457
Address R.F.D. 4, Gt. Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Spector Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of October, 1966

My commission expires May 21, 1967
Wilma M. Lisidahl Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- B & R DRILLING, INC.
Farm- Harbaugh No. 2

SEC. 25 T. 14 R. 15W
SE SW SW

Total Depth. 3201½
Comm. 9-11-51 Comp. 9-23-51
Shot or Treated.
Contractor.
Issued. 10-20-51

County Russell
KANSAS



Elevation. 1791

Production. pmp. 50 bbls.

CASING:

8 5/8" 812' cem w/400 sx. .
5½" 3200½' cem w/100 sx.

Figures Indicate Bottom of Formations.

clay, shale	35
sand	45
shale, shells	190
sand, shale	220
shale, shells	270
sand	450
shale, shells, redbed	802
anhydrite	840
shale, redbed	1220
shale, salt	1340
shale, shells	1560
shale, lime	1998
lime	2051
limc, shale	2993
lime	3201½
Total depth.	

Tops:	
Hecbner	2910
Lansing	2967
Gorham	3200