



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION

OCT 27 1964

J. P. Roberts
Assistant Director
500 Insurance Building
212 North Market
Wichita 2, Kansas

CONSERVATION DIVISION
Wichita, Kansas

10-27-1964

Dear Sir:

Mr. Parrick of Hudson Petroleum Co. has this

date requested permission to plug the following described well:

Mr. Parrick guarantees payment of the plugging fee.

Operator's full Name: Hudson Petroleum Co.

Complete Address: Box 33.4720 Rainbow, Kansas City, Kansas

Lease Name: Lee Well No. # 7

Location: C SE NW Sec. 26 Twp. 21 Rge. 25 (E)(W)

County Hodgeman Total Depth 4556' Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Parrick was instructed to plug the well as follows:

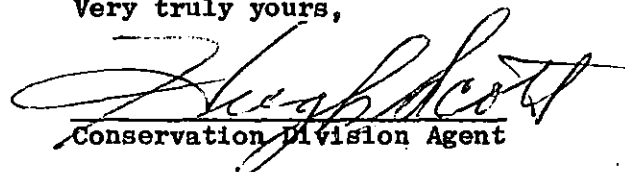
8 5/8"-453' Circulated w/cement. 5 1/2"-4510' Cemented.

Plug bottom w/10' bridge 4500' to 4490'. 10 Sax. cement 4490' to 4410'

Mud 4410' to 460' 35 Sax. cement 460' to 360'

Mud 360' to 45' 15 Sax. cement 45' to 0

Very truly yours,


Conservation Division Agent