


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market,
Wichita, Kansas

NORTH

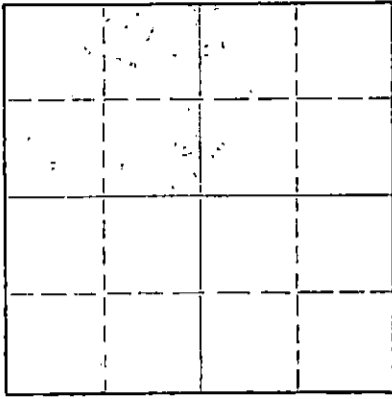

Locate well correctly on above Section Plat

Hamilton County, Sec. 12 Twp. 21S Rge. 41W (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE SW
Lease Owner Texaco Inc.
Lease Name A. L. Bengtson Well No. 1
Office Address 614 Bitting Bldg.

Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 12/1 1963
Application for plugging filed 11/25 1969
Application for plugging approved 11/28 1969
Plugging commenced 12/10 1969
Plugging completed 12/10 1969

Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production 6/11 1968
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves
Producing formation Winfield Depth to top 2782 Bottom 2792 Total Depth of Well 2812 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"	250'	None
				4 1/2"	2812'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole plugged as follows: 2806-2650 w/15 sx cmt; 2650-1200 w/hvy ϕ mud; 1200-surf w/100 sx cmt.


RECEIVED
STATE CORPORATION COMMISSION
DEC 17 1969
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Sargent Casing Pulling Company
Address Liberal, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
M. R. Wilson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. R. Wilson Dist. Supt.
614 Bitting Bldg., Wichita, Ks. 67202
(Address)



SUBSCRIBED AND SWORN TO before me this 15th day of December, 1969
Peggy Sue Jones
Notary Public.

My commission expires 10-13-73

LEASE: A. L. BENGTSOON NO. 1
 OWNER: TEXACO INC.
 CONTRACTOR: EARL F. WAKEFIELD
 COMM: 11-7-63
 COMP: 11-11-63

LOCATION: NE SW
 SECTION 12-21S-41W
 HAMILTON COUNTY, KANSAS
 CASING: 7" Set at 250'
 4 1/2" Set at 2812'

Surface Soil	35
Sand and Clay	80
Sandy Clay	170
Blue Shale	250
Shale and Shells	900
Shale	1660
Shale & Shells - Red Bed	1675
Anhydrite	1700
Salt and Red Bed	1755
Anhydrite	1790
Salt and Red Bed	2015
Red Beds and Shale	2130
Red Bed	2350
Anhydrite	2364
Lime and Shale	2450
Red Beds, Shale and Lime	2510
Shale and Lime	2734
Red Beds, Shale and Lime	2814
R.T.D.	2814

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 26 1969
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct copy of the log on the A. L. BENGTSOON #1 well, located NE SW of Section 12-21S-41W, Hamilton County, Kansas.

EARL F. WAKEFIELD

BY *Fred S. Baker*

Subscribed and sworn before me this 22 day of November, 1963.

My commission expires:
January 25, 1965

Wanda W. Riley
 WANDA W. RILEY NOTARY PUBLIC