


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

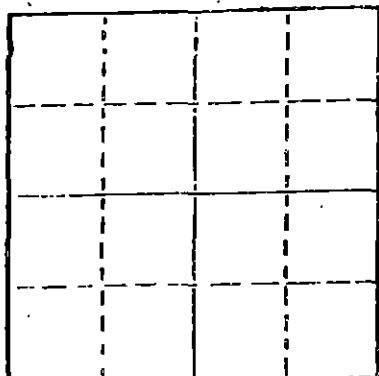

Locate well correctly on above
Section Plot

Pawnee County, Sec. 34 Twp. 22S Rge. 17WE/W
Location as "NE/CNW/SW" or footage from lines
NW SW SW

Lease Owner L. D. Drilling Company
Lease Name Frick #1 Well No. 1

Office Address P. O. Box 324, Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole

Date Well completed September 23, 1978 19'

Application for plugging filed September 22, 1978 19'

Application for plugging approved September 22, 1978 19'

Plugging commenced 2:30 AM September 23, 1978 19'

Plugging completed 3:30 AM, September 23, 1978 19'

Reason for abandonment of well or producing formation

Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 1224'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	259'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Filled hole with heavy mud.
50 sacks at 120'; 25 sacks at
240'; solid bridge at 40' with 10
sacks - total of 85 sacks 50/50
Pozmix with 2% gel.

Also 1 sack hulls at 40'.

RECEIVED
STATE CORPORATION COMMISSION

SEP 26 1978

CONSERVATION DIVISION
Wichita, Kansas

9-28-78

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Sterling Drilling Company
P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE ss.
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner
F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579
(Address)

SWORN AND SWORN TO before me this 25th day of September 19 78

My commission expires



Charles M. Hall, Notary Public.

STERLING DRILLING COMPANY
 P. O. Box 129
 Sterling, Kansas 67579

WELL LOG ----- FRICK #1
 Located: NE SW SW, Section 34-22S-17W, Pawnee County, Kansas

OWNER: L. D. Drilling Company
 ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: September 15, 1978
 COMPLETED: September 23, 1978

TOTAL DEPTH: 4224'

<u>LOG</u>		<u>CALING RECORD</u>
0 - 225	Sand and Shale	Ran 6 joints 8 5/8" OD casing, 247.24' cemented at 259' K.B. with 200 sacks 50/50 Pozmix with 3% cc. Plug down at 7:00 PM, 9-15-78, by Howco.
225 - 262	Shale - Shells	
262 - 1060	Shale, Red Bed	
1060 - 2084	Shale	
2084 - 3095	Lime and Shale	
3095 - 4224	Lime	Plugged.

RECORDED
 STATE OF KANSAS
 SEP 23 1978
 COMPTROLLER'S OFFICE
 Topeka, Kansas