


15.083.20871.00.00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Hodgeman SEC. 26 TWP. 23S RGE. 22W E/W
Location as in quarters or footage from lines:
C SW NE



Locate Well
correctly on above
Section Platt.

Lease Owner American Energies Corporation
Lease Name Koontz Well No. 1
Office Address 575 Fourth Financial Center, Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed July 31, 1981
Application for plugging filed July 31, 1981
Plugging commenced July 31, 1981
Plugging completed July 31, 1981
Reason for abandonment of well or producing formation _____

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Tamlin

Producing formation _____ Depth to top _____ bottom _____ T.D. 4535

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Surface	Shale	0	310	8-5/8"	307'	none
	cemented with 250 sx 60/40 posmix, 2%gel, 3%cc, plug down 5 p.m. 7-23-81.					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged as follows w/50 sx @ 1100';
50 sx @ 400'
10 sx @ 40' w/solid bridge plug
10 sx rathole; job completed at 9 a.m. 7-31-81 by Sun

RECEIVED
STATE CORPORATION COMMISSION


AUG 4 1981

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Husky Drilling Co., Inc. Conservation Division
Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

Jon T. Williams, Jr. (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) HUSKY DRILLING CO., INC.
200 E. First, Suite 500, Wichita,
(Address) Kansas



SUBSCRIBED AND SWORN to before me this 31st day of July, 19 81

My Commission Expires January 14, 1985

Geraldine Stewart
Geraldine Stewart Notary Public.



15. 083. 20871. 00. 00
200 East First, Suite 500
~~800 Biting Bldg~~
Wichita, Kansas 67202
Phone 316 - 263-7904
Mobile Phone 316 - 793-7859 Unit 7070

July 31, 1981

WELL LOG-----Koontz No. 1
Located: C SW NE of Section 26-23S-22W, Hodgeman Co., Kansas

OPERATOR: American Energies Corporation
ROTARY CONTRACTOR: Husky Drilling Co., Inc.

COMMENCED: July 23, 1981
COMPLETED: July 31, 1981

Rotary Total Depth: 4535'

LOG

0 -	310	Sand & shales
310 -	780	Red Bed & shale
780 -	940	Sand
940 -	945	Red Bed
945 -	2005	Shale
2005 -	2410	Shale - shells
2410 -	3910	Shale & lime
3910 -	3960	Lime
3960 -	4063	Lime & shale
4063 -	4250	Lime
4250 -	4328	Lime & shale
4328 -	4535	Lime


CASING RECORD

Ran 8 jts., new 24#, 8-5/8" csg.,
tallied 300.44' set @ 307' KB
w/225 sx 60/40 pos, 2% gel, 3% cc,
plug down at 5 p.m. by Sun.

Plugged & Abandoned 7-31-81.

I certify the above to be a true and correct copy of the driller's log
to the best of my knowledge and belief.

HUSKY DRILLING CO., INC.

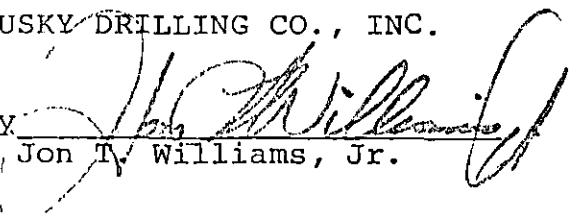By 
Jon T. Williams, Jr.

RECEIVED
STATE CORPORATION COMMISSION

AUG 4 1981
CONSERVATION DIVISION
Wichita, Kansas