

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

**Strike out upper line
when reporting plug-
ging off formations.**

NORTH

**Locate well correctly on above
Section Plat**

State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

Hodgeman County. Sec. 11 Twp. 22S Rge. (E) (W) 26

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW $\frac{1}{2}$ SW $\frac{1}{2}$ SW $\frac{1}{2}$

Lease Owner Darby & Bothwell, Inc.

Lease Name Faulkner Well No. 1

Office Address 2003 Philtower, Tulsa, 3, Oklahoma.

Character of Well (completed as Oil, Gas or Dry Hole) Dry.

Date well completed July 11, 1945. 19

Application for plugging filed July 11, 1945. 19

Application for plugging approved July 11, 1945. 19

Plugging commenced July 11, 1945. 19

Plugging completed July 11, 1945. 19

Reason for abandonment of well or producing formation Dry hole.

If a producing well is abandoned, date of last production.....19.....
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced?.....**Yes.**.....

Name of Conservation Agent who supervised plugging of this well..... H. W. Kerr, Great Bend, Kansas......
Producing formation..... None..... Depth to top..... Bottom..... Total Depth of Well..... 5128..... Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet tofeet for each plug set.

Filled with mud to 1400', set plug @ 1400 and cemented with 15 sacks, filled hole with mud to 355', set plug and put in 25 sacks cement, filled with mud to 40', set plug and cemented to top with 10 sacks of cement.

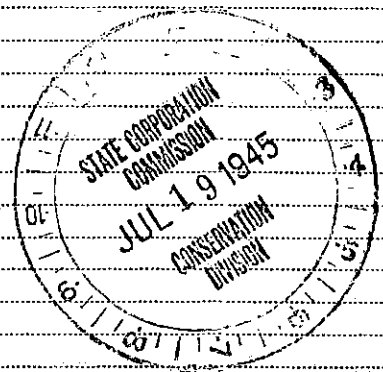

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to.....**Darby & Bothwell, Inc.,**
Address.....**2003 Philtower Bldg.,**
.....**Tulsa, 3, Oklahoma,**

STATE OF Oklahoma, COUNTY OF Tulsa, SS.
F. T. Anderson (employee of owner) ~~owner of the well~~ of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. 1 1 1

(Signature)

2003 Philtower Bldg., Tulsa, 3, Oklahoma.
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of July, 1945.

My commission expires March 1, 1946.

Notary Public.

FORMATION RECORD

	<u>FROM</u>	<u>TO</u>
Shale and shells	0	120
Shale & shells	120	160
Shale	160	255
Sand	255	350
Shale	350	375
Shale & shells	375	760
Shale & red bed	760	890
Shale & shells	890	1015
Shale	1015	1135
Red Sand	1135	1325
Red bed	1325	1415
Shale & red bed	1415	1610
Anhydrite	1610	1645
Shale	1645	1650
Sand	1650	1700
Shale & sand	1700	2190
Shale & shells	2190	2190 2350
Sand & lime	2350 2190	2440
Sandy lime	2440	2530
Sandy lime & shale	2530	2600
Sandy shale	2600	2695
Sandy lime & shale	2695	2785
Lime	2785	3085
Lime & shale	3085	3115
Lime	3115	3195
Lime & shale	3195	3575
Lime	3575	3580
Lime & shale	3580	3645
Lime	3645	3695
Lime & shale	3695	3790
Lime	3790	3900
Lime & shale	3900	3950
Lime	3950	4045
Lime & shale	4045	4130
Lime	4130	4400
Lime & shale	4400	4430
Lime	4430	4510
Lime & chert	4510	4535
Lime	4535	4740
Lime & chert	4740	4800
Lime	4800	5126 T.D.

Dry and abandoned.