

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Hodgeman County. Sec. 15 Twp. 22S Rge. (E) 25 (W)

Location as "NE/CNW/SW" or footage from lines 2310' FNL & 990' FWL

Lease Owner Kewanee Oil Company

Lease Name Staley Well No. 5

Office Address P. O. Box 360, Hoisington, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Water Input Well

Date well completed 3-24-66 (Oil Well) 12-6-1966

Application for plugging filed 5-17-1967

Application for plugging approved 5-18-1967


Plugging commenced 6-9-1967

Plugging completed 7-1-1967

Reason for abandonment of well or producing formation Dry - not suitable for input.

If a producing well is abandoned, date of last production 5-19-1966

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves

Producing formation Mississippi Depth to top 4586 Bottom Total Depth of Well 4670 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Heebner	dry	3880		8-5/8"	109	none
Toronto	dry	3897		5-1/2"	4670	3815
Lansing-K.C.	dry	3930				
Base K.C.	dry	4330				
Cherokee	dry	4464				
Fort Scott	dry	4472				
Conglomerate	dry	4556				
Mississippi	oil	4586				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 4500'. Dumped 5 sacks of cement.  
pulled pipe.  
Squeezed well with 20 sacks of mud and 100 sacks of cement by HOWCO.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 11 1967

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221, Great Bend, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.

Bill Patton (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Patton

P. O. Box 360, Hoisington, Kansas 67544  
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of July, 1967

Len B. McMillan

My commission expires 8-2-69

Notary Public.


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

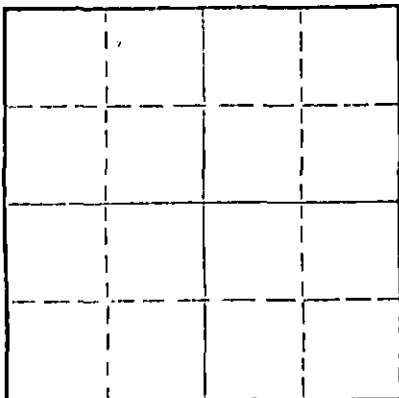

Locate well correctly on above  
Section Plat

Hodgeman County, Sec. 15 Twp. 22 Rge. 25 (E) (W)  
Location as "NE/CNW/SW" or footage from lines. SE SW NW  
Lease Owner Kewanee Oil Company  
Lease Name Staley Well No. 5  
Office Address P. O. Box 360 Hoisington, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 6-9-67 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 6-30-67 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 1670 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	108	None
				5 1/2	None	3815

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 6 1967  
CONSERVATION DIVISION  
WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved in. Rigged up unit.

Sanded to 4500'. Dumped 5 sacks of cement. Working pipe. Shot pipe at 3790'.

Working pipe. Circulating. Howco spotted 76 bbl. of oil.

Working pipe. Shot pipe at 3810'.

Working pipe. Pulling pipe.

Squeezed well with 20 sacks of mud and 100 sacks of cement by Howco.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.  
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 3 day of July, 19 67

My commission expires May 27, 1969

Notary Public.

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

STALEY #5  
 330' FSL AND 990' FWL OF NW $\frac{1}{4}$   
 SECTION 15-22S-25W  
 HODGEMAN COUNTY, KANSAS

COMMENCED: MARCH 12, 1966  
 COMPLETED: MARCH 26, 1966

OPERATOR - KEWANEE OIL COMPANY

DEPTH		FORMATION	REMARKS
FROM	To		
0	111	SURFACE SOIL AND SHALE	RAN 4 JOINTS OF 8-5/8" CASING, SET @ 111' w/150 SACKS CEMENT.
111	880	SHALE AND SHELLS	
880	1460	SHALE AND SAND	
1460	1726	SHALE	
1726	2000	SHALE AND SHELLS	
2000	4063	SHALE AND LIME	
4063	4184	LIME	
4184	4361	LIME AND SHALE	
4361	4416	LIME	
4416	4520	LIME AND SHALE	
4520	4609	LIME	
4609	4645	LIME, SHALE AND CHERT	
4645	4671	LIME	
4671	TD	LOG	RAN 145 JOINTS OF 5 $\frac{1}{2}$ " CASING, SET @ 4670' w/135 SACKS CEMENT.

RECEIVED  
 STATE CORPORATION COMMISSION

MAY 18 1967

CONSERVATION DIVISION  
 Wichita, Kansas

I, E. E. HALL, CERTIFY THIS IS A CORRECT COPY OF THE DRILLERS' LOG FOR THE WELL DRILLED 330' FSL AND 990' FWL OF NW $\frac{1}{4}$  SECTION 15-22S-25W, HODGEMAN COUNTY, KANSAS, TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*E. E. Hall*

E. E. HALL

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC WITHIN AND FOR SAID COUNTY AND STATE, ON THIS 29TH DAY OF MARCH, 1966 PERSONALLY APPEARED E. E. HALL, TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.

*Barbara J. Layton*  
 BARBARA J. LAYTON, NOTARY PUBLIC

My COMMISSION EXPIRES FEBRUARY 1, 1968.