


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

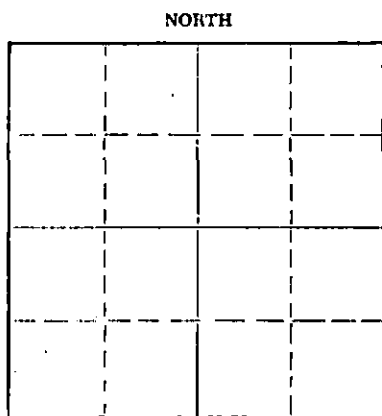

Locate well correctly on above
Section Plat

Pawnee County, Sec. 15 Twp. 22S Rge. 15 (E) 15 (W)
Location as "NE/CNW/SW" or footage from lines SW SW SW
Lease Owner Chief Drilling Co., Inc.
Lease Name FERTIG Well No. 1
Office Address Box 797 - Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12/31 1964
Application for plugging filed 12/31 1964
Application for plugging approved 12/31 1964
Plugging commenced 12/31 1964
Plugging completed 12/31 1964
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty - Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4016 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	207'	8-5/8"	207'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Wooden plug set @ 350'
Mixed 25 sacks cement through drill pipe
1/3 sack hulls and wooden plug set @ 200'
Mixed 25 sacks cement through drill pipe
1/3 sack hulls and wooden plug set @ 35'
Mixed 10 sacks cement through drill pipe

RECEIVED
STATE CORPORATION COMMISSION
1-7-1965

JAN 7 1965

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Chief Drilling Co., Inc. (If additional description is necessary, use BACK of this sheet)
Address Box 797 - Great Bend, Kansas

STATE OF KANSAS COUNTY OF BARTON, ss.
V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God, CHIEF DRILLING CO., INC.

(Signature) V. Richard Hoover
Box 797 - Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 31st day of December, 19 64

My commission expires Jan. 26, 1967
Carmen R. Cook
Notary Public.

WELL LOG

Chief Drilling Co., Inc.
 Box 797
 Great Bend, Kansas

FERTIG #1
 SW SW SW Sec. 15-22S-15W
 Pawnee County, Kansas

Contractor: Chief Drilling Co., Inc.

Commenced: 12-21-64
 Completed: 12-31-64

Casing Record: 8-5/8" @ 207' w/200 sacks Sunset & 2 sacks Gel.

 DRY & ABANDONED

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Surface Sand	0	207	1991 Gr.
Shale	207	921	1993 D.F.
Anhydrite	921	948	1996 K.B.
Shale & Shells	948	1830	
Lime & Shale	1830	2040	
Lime	2040	2495	
Lime & Shale	2495	3300	
Lime	3300	3776	
Lime & Shale	3776	3862	
Conglomerate	3862	3922	
Chert	3922	3951	
Shale	3951	4006	
Dolomite	4006	4016	
Total Depth	4016		

<u>FORMATION TOPS</u>	
Anhydrite	921 +1075
Heebner	3407 -1411
Brown Lime	3530 -1534
Lansing	3538 -1542
Base Kansas City	3776 -1780
Conglomerate	3862 -1866
Viola	3922 -1926
Simpson	3951 -1955
Arbuckle	4006 -2010
Total Depth	4016 -2020

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the SW SW SW Sec. 15-22S-15W, Pawnee County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover

 V. Richard Hoover, President

Subscribed and sworn to before me this 2nd day of January, 1965.

Carmen R. Cook

 Carmen R. Cook, Notary Public

My commission expires: Jan. 26, 1967.

RECEIVED
 STATE CORPORATION COMMISSION

JAN 7 1965

CONSERVATION DIVISION
 Wichita, Kansas