


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

NORTH

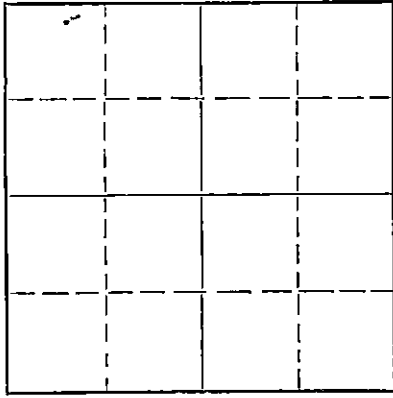

Locate well correctly on above Section Plat

Stafford County. Sec. 20 Twp. 22 Rge. (E) 12 (W)  
Location as "NE/CNW/SW" or footage from lines SE - SE - SW  
Lease Owner Sterling Drilling Company  
Lease Name Ukens Well No. 1  
Office Address Sterling, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed May 1, 1956  
Application for plugging filed June 8, 1956  
Application for plugging approved June 8, 1956  
Plugging commenced 6 - 8 1956  
Plugging completed 6 - 14 1956  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. M. Brundage  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3775 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	200	8 5/8		
		0	3774	5 1/2		2817'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded to 3500' - dumped 5 sks cement - filled hole with mud to 195' - set 10' rock bridge - dumped 3 sks cement with bailer - left set over night - bailed fluid down to plug - checked ok - dumped 17 sks cement - mudded hole to 35' - set 10' rock bridge - dumped 10 sks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & D Casing Pulling Company License # 236  
Address Box 569 Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF Rice, ss.  
F. A. Whellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. A. Whellner  
Sterling, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of June, 19 56

My commission expires My Commission Expires Jan. 22, 1958

Bernard Lander milk  
Notary Public.

24-7868-5 3-53-20M

PLUGGING  
FILE SEC 20. T 22 R 12W  
BOOK PAGE 69 LINE 32

CONS. DIVISION  
Wichita, Kansas

6-28-56