


WELL PLUGGING RECORD

Give All Information Completely
the Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Hodgeman County. Sec. 24 Twp. 22 Rge. (E)23 (W)
Location as "NE/CNW%SW%" or footage from lines C NE SW
Lease Owner PICKRELL DRILLING COMPANY
Lease Name CALDWELL Well No. 1
Office Address 705 4th National Bank Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 4 19 63
Application for plugging filed April 4 19 63
Application for plugging approved April 4 19 63
Plugging commenced April 4 19 63
Plugging completed April 4 19 63
Reason for abandonment of well or producing formation Dry Hole

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4712 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	270'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 250'. Set plug. Cemented with
15 sacks cement. Heavy mud to 40'. Set plug.
Cemented with 13 sacks cement to bottom of
cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
APR 9 1963

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor PICKRELL DRILLING COMPANY
Address 705 4th National Bank Bldg, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. W. SEBITS (Signature) (Signature) owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. SEBITS
705 4th Natl Bank Bldg, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 5th day of April, 19 63
Maxine Blackman
Maxine Blackman Notary Public.

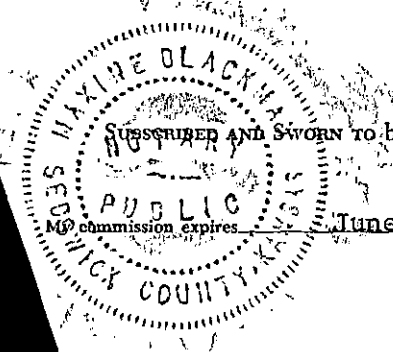

15.083-10181.00.00
ROTARY DRILLING LOG

COMPANY: PICKRELL DRILLING COMPANY
705 4th National Bank Bldg
Wichita, Kansas
LOCATION: Caldwell No. 1, C NE SW 24-T22S-R23W,
Hodgeman County, Kansas

Rotary Drilling Commenced 3-19-63

Rotary Drilling Completed 4--2-63

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (7 jts) 8 5/8" Surface Casing set at 270', cemented with 185 sacks cement. Circulated. Completed 8:15 P.M. March 19, 1963, no oil string run. D & A.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

70	Surface Soil & Clay	<u>C.F. S.</u>
271	Shale & Shells	4575
650	Blue Shale	4580
880	Red Beds - Shale	4585
900	Blaine	4590
990	Red Beds.	4595
1185	Sand	4600
1510	Shale & Shells	4605
1550	Anhydrite	4610
2055	Shale & Shells	4685
2380	Lime & Shale	4712
3010	Lime	
3110	Lime & Sandy Shale	<u>Slope Tests</u>
3140	Lime & Shale	2500
3255	Sandy Lime & Shale	3000
3570	Lime & Shale	3500
3715	Shale & Sandy Lime	4000
3920	Lime & Shale	
4320	Lime	
4564	Lime & Shale	<u>S. L. M.</u>
4635	Mississippian	3510
4675	Mississippian Chert	3476
4705	Mississippian	4320
4712	Gilmore City Sand & RTD	

RECEIVED
STATE CORPORATION COMMISSION

APR 9 1963

CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By *C. W. Sebits*
C. W. SEBITS Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 45th day of April, 19 63, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: June 21, 1966

Maxine Blackman
Maxine Blackman Notary Public