

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-051-03303-00-00
Spot: NESWSESW Sec/Twnshp/Rge: 19-11S-16W
436 feet from S Section Line, 1658 feet from W Section Line
Lease Name: SLIMMER Well #: 5
County: ELLIS Total Vertical Depth: 3384 feet

Operator License No.: 3553
Op Name: CITATION OIL & GAS CORP.
Address: 14077 CUTTEN RD PO BOX 690688
HOUSTON, TX 77269

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	7	3384		190 SX
SURF	10	1033		500 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/24/2017 10:00 AM
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC
Proposal Rcvd. from: DENNIS MICK Company: CITATION OIL & GAS CORP. DBA Phone: (785) 639-6314

Proposed Plugging Method: Ordered 725 sx 60/40 pozmix 4% gel cement, 19 sx gel and 600 # hulls.
Perforations: 3328' - 3338'.

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/24/2017 4:00 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Perfs:

E.L.I. perforated at 1450' - 995' (collar at 1000').
Express ran in hole with tubing to 3290'. Allied rigged to tubing and pumped 18 sx gel followed by 100 sx cement w/300 # hulls mixed in. Pulled tubing to 1450'. Rigged to tubing and pumped 500 sx cement w/300 # hulls mixed in to circulate cement up 7" casing and 10" casing. Shut in 10" casing. Pulled tubing. Rigged to 7" casing and pressured 7" and 10" casings with 40 sx cement at 50 psi. Shut in pressure 50 psi.

GPS: 39.07595 -099.14285

KCC WICHITA
FEB 14 2017
RECEIVED

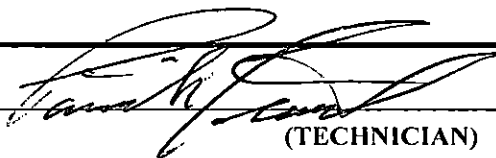
INVOICED
FEB 16 2017

Remarks: ALLIED CEMENTING TICKET # 68247

Plugged through: TBG

District: 04

Signed


(TECHNICIAN)

cm

JAN 30 2017