



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION
JUN 9 1970
CONSERVATION DIVISION
Wichita, Kansas

6-9-70

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Lindenmuth of Chief Drilling Co. has this

date requested permission to plug the following described well:

Mr. Lindenmuth guarantees payment of the plugging fee.

Operator's full Name: Chief Drilling Co. Inc.

Complete Address: Suite 905 Century Plaza, Wichita, Kansas

Lease Name: Mooney Well No. 1

Location: Approx NE SW Sec. 25 Twp. 22 Rge. 22 (E)(W)

County: Hodgeman Total Depth 4518' Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Lindenmuth was instructed to plug the well as follows:

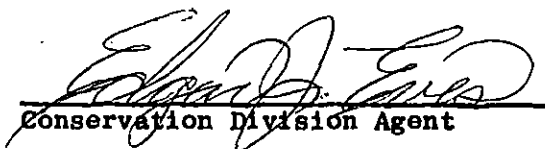
8 5/8" to 175' circulated w/ cement. Mud 4518' to 850'

Spot 80 sacks cement 850' to 550' Mud 550' to 175'

Spot 30 sacks cement 175' to 75' Mud 75' to 40'

Plug, Halls & 10 sacks cement 40' to 0'.

Very truly yours,


Conservation Division Agent