


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Request Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Stafford County, Sec. 7 Twp. 22S Rge. 13(w)

Location as "NE/CNW4SW4" or footage from lines C-NW-SW-NW
Lease Owner Sunray Oil Corporation
Lease Name Baier Well No. 2
Office Address Box 195, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 4 19 54
Application for plugging filed January 8 19 54
Application for plugging approved January 6 19 54
Plugging commenced January 4 19 54
Plugging completed January 4 19 54
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Depth to top Bottom Total Depth of Well 3820 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|--------------|---------|------|------|-------|--------|------------|
| Heebner | | 3280 | | 8 5/8 | 389 | none |
| Brown Lime | | 3409 | | | | |
| Lansing-KC | | 3422 | 3659 | | | |
| Marmaton | water | 3666 | | | | |
| Conglomerate | | 3690 | | | | |
| Viola | | 3702 | | | | |
| Simpson | water | 3740 | | | | |
| Arbuckle | water | 3792 | 3820 | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole to 300' and placed 35 sax cement. Mudded hole to 35' and placed 15 sax cement. Dry hole, plugged and abandoned.

1-16-54

FILED
STATE CORPORATION COMMISSION
JAN 16 1954
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Stickle Drilling Company
Address Philtower Building, Tulsa, Oklahoma


STATE OF Kansas, COUNTY OF Barton, ss.
Robert K. Crouch (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert K. Crouch
Box 195, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of January, 19 54

Notary Public

My commission expires December 24, 1956

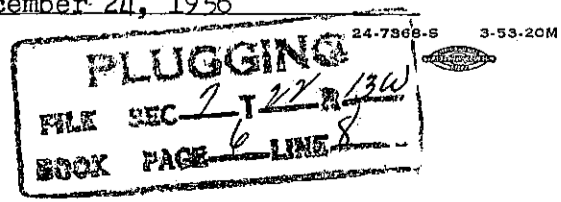

Sunray Oil Corporation
Tulsa, Oklahoma

Tulsa, Oklahoma
January 7, 1954

CONTRACTOR: Stickle Drilling Company
Drilling Commenced: December 21, 1953
Drilling Completed: January 4, 1954

Baier #2 NW/4 SW/4 NW/4 Sec.
7-22S-13W, Stafford
County, Kansas.

DRILLERS LOG

| | |
|----------------------|--------------|
| Sand | 0-390 |
| Red Bed | 390-780 |
| Anhydrite | 780-810 |
| Shale & Shells | 810-1670 |
| Lime & Shale | 1670-1830 |
| Lime | 1830-1960 |
| Lime & Shale | 1960-2200 |
| Lime, Shale & Shells | 2200-2300 |
| Shale & Lime | 2300-2485 |
| Shale & Broken Lime | 2485-2640 |
| Shale & Lime | 2640-2885 |
| Lime & Shale | 2885-3005 |
| Shale & Lime | 3005-3100 |
| Lime & Shale | 3100-3433 |
| Lime | 3433-3473 |
| Lime & Shale | 3473-3528 |
| Lime | 3528-3629 |
| Lime & Conglomerate | 3629-3682 |
| Shale | 3682-3705 |
| Conglomerate | 3705-3750 |
| Shale | 3750-3771 |
| Shale & Dolomite | 3771-3807 |
| Arbuckle | 3807-3820 TD |

I, Lillian T. Bonham hereby certify the above to be a true and complete Drillers Log of Sunray Oil Corporation's Baier #2 NW/4 SW/4 NW/4 Section 7-22S-13W, Stafford County, Kansas.

Lillian T. Bonham
Lillian T. Bonham

Edward Lockell
Notary Public

June 26, 1957
My Commission Expires

