

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 20 Twp. 22 Rge. 13 (E)W (W)

Location as "NE/CNW&SW" or footage from lines S/2 SW NW
Lease Owner Tom-Kat, Inc.
Lease Name Soeken "A" Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 6-8-66 19
Plugging completed 6-11-66 19
Reason for abandonment of well or producing formation Depleted.

NORTH

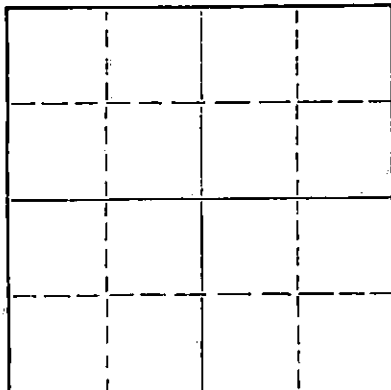

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elting
Producing formation Depth to top Bottom Total Depth of Well 3858 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE ..	PUT IN	PULLED OUT
				8-5/8	257'	None
				5-1/2"	3650'	2831'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, ran 40' of sand and dumped 5 sacks of cement with dump bailer. Pulled 5 1/2" casing, set rock bridge @ 250' and dumped 5 sacks of cement with dump bailer. Tried to bail hole down, set one tub of sand and 3 sacks of cement. Baile hole down and dumped 17 sacks of cement. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
JUL 7 1966
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE*

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.
Noel J. Knight (employee of owner) or (owner or operator)

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 9th day of July, 1966

Milton J. Volin

Notary Public.

My commission expires May 20, 1968