


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 North Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Form CP-4

15-D79-19114-0000

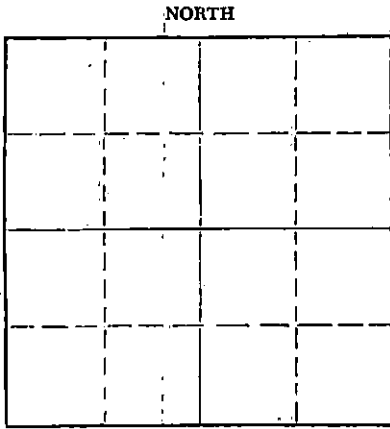

Locate well correctly on above
Section Plat

Harvey County, Sec. 11 Twp. 23S Rge. 2W (E) (W)

Location as "NE/CNW&SW" or footage from line Center SE NE
Lease Owner Kantor Oil Company
Lease Name Haury "B" Well No. 1
Office Address 1720 First National Bldg., Tulsa 3, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 31 1936
Application for plugging filed August 1964
Application for plugging approved August 1964
Plugging commenced August 17 1964
Plugging completed August 27 1964
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production August 9 1964
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2982 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				12-1/2"	134	-0-
				8-1/4"	2952	2241

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

in the pipe
Filled back with chat and dumped 7 sacks of cement. Shot pipe off at 2241'.
Pulled pipe and mudded hole to 150'. Set rock bridge and dumped 50 sacks of cement. Mudded hole to 30' and dumped 25 sacks of cement at base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
SEP 1 1964
CONSERVATION DIVISION
Wichita, Kansas

9-1-1964

Name of Plugging Contractor Bert Self (If additional description is necessary, use BACK of this sheet)
Address R. R. #4, Hutchinson, Kans.

STATE OF Kans. COUNTY OF Reno, ss.

Employee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self
R. R. #4, Hutchinson, Kans.
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of August, 19 64

My commission expires October 18, 1965

Notary Public.



WELL LOG BUREAU - KANSAS GEOLOGICAL SURVEY
 412 Union National Bldg., Wichita, Kansas.

15-679-19114-0000


Harvey Oil Corp.
 THE PALMER OIL CORP.
 Henry No. 1-B

11-93 2-W
 11-23-2-W
 SEC. 11. T. 25 N. R. 37
 Cor. SE 1/4

Harvey B #1

Total Depth. 2982'
 Com. 12-8-35 Comp. 12-31-36
 Shot or Treated.
 Contractor. The Palmer Oil Corp.
 Issued. 1-23-37

County. Harvey



CASING:
 12 1/2" 134' 1"
 8 1/2" 2951' 10"

Elevation.

Production. Pet. 1730 B.

Figures Indicate Bottom of Formations.

surface	100
sand & shale	140
shale & shells	365
brkn lime	750
lime	900
shale	1125
shale & shells	1225
shale	1480
shale & shells	1725
lime brkn	2780
shale & lime sft	1870
shale & shells	1910
lime brk	2040
shale	2140
lime	2155
shale & shells	2355
lime	2450
sand	2465
shale	2495
lime	2645
sand sft	2665
lime brkn	2890
shale	2947
chat	2982
gas at 2976-78	
oil at 2980	
Total Depth.	2982

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 11 1964.
 CONSERVATION DIVISION
 Wichita, Kansas