

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Jitting Building
Wichita, Kansas

WELL PLUGGING RECORD OR FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

NORTH

23 50 2 W

+

12

**Locate well correctly on above
Section Plat**

Harvey. County. Sec. 12 Twp. 23 Rge. (E) 2 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW $\frac{1}{4}$ NW $\frac{1}{4}$
Lease Owner The Palmer Oil Corporation
Lease Name McBurney Well No. 2
Office Address 415 Union National Bank Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed November 7 19 36
Application for plugging filed February 9 19 45
Application for plugging approved February 9 19 45
Plugging commenced 19
Plugging completed March 22 19 45
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production December 19 44
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well..... R. Durkee, McPherson, Kansas
Producing formation..... Chat..... Depth to top..... Bottom..... Total Depth of Well..... Feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				12 $\frac{1}{2}$ "	151	None
				8 5/8"	2996'	2147.2

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, fromfeet tofeet for each plug set.

Hole made solid at 2950'
8 sacks cement dumped at 2950'
Heavy mud 2950' - to 200'
Hole bridged at 190'.
30 sacks cement at 190'.
Heavy mud
5 sacks cement at top of surface.

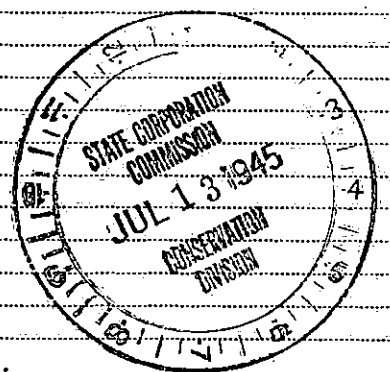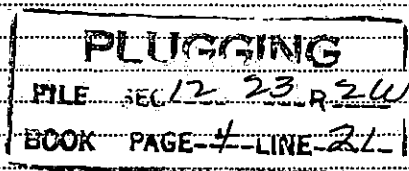

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... The Palmer Oil Corporation
Address..... 415 Union National Bank Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Otto H. Schnepel (employee of owner) or (owner or operator) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
 described well as filed and that the same are true and correct. So help me God.

(Signature) Otto Kuhnreger

415 Union National Bank Building,
(Address) Wichita, Kansas

SUBSCRIBED AND SWORN to before me this 12th day of July, 19 45

My commission expires..... **My commission expires Mar. 21, 1949**


Notary Public.

THE PALMER OIL CORP.
McBurney No. 2.

SEC.12 T.23 R.2W
Cen SW NW

Total Depth. 2976'
Comm. 10-16-36 Comp. 11-7-36
Shot or Treated.
Contractor. The Palmer Oil Corp.
Issued. 11-14-36

County. Harvey



CASING:

1" 148'1"
12 1/2" 2951'5"
8 3/4"

Elevation.

Production. Pot. 1509 B.

Figures Indicate Bottom of Formations.

sand & shale	150
shale & shells	360
lime broken	500
shale & shells	530
lime	640
lime broken	765
lime	790
shale & shells	865
lime & shale	930
shale & shells	1080
shale	1225
shale & shells	1440
shale & lime	1530
shale & shells	1745
lime	1855
shale & lime	1935
lime broken	2005
lime	2030
shale	2085
lime	2150
shale	2260
shale & lime	2330
lime	2405
broken lime	2425
lime hrd	2460
sand	2485
shale	2490
shale & lime	2570
lime	2655
shale	2665
lime	2710
shale	2735
lime hard	2875
lime broken	2910
broken shale & lime	2940
shale	2945
chat	2961
shell, G., soft	2962
chat white hard	2971
Show of oil 2971-72	
chat white sft	2976
Total Depth	2976

Potential test taken 11-5-36
to 11-6-36

