

STATE OF KANSAS  
STATE CORPORATIONS COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

15.053.01275.00.00  
WELL PLUGGING RECORD

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH



Locate well correctly on above  
Section Plat

Ellsworth County. Sec. 24 Twp. 17 Rge. (E) 10 (W)  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW SE  
Lease Owner. Beardmore Drilling Company  
Lease Name. Bunce Well No. 1  
Office Address. 606 Petroleum Building, Wichita 2, Kansas.  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole  
Date, well completed June 15, 1943.  
Application for plugging filed September 3, 1943.  
Application for plugging approved September 3, 1943.  
Plugging Commenced September 3, 1943.  
Plugging Completed September 10, 1943.  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production ----- 193.  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Durkee, McPherson, Kansas  
Producing formation ----- Depth to top ----- Bottom ----- Total Depth of Well 3280 Feet.  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle Lime		3249	3280	5 $\frac{1}{2}$	3288	2763

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from ----- feet to ----- feet for each plug set.

3280' to 3244' Cement, 4 sacks.  
3244' to 215' Mud  
215' to 190' Cement, 10 sacks.  
190' to 20' Mud  
20' to top Cement, 5 sacks.

Pd.  
9/22/43  
No.

PLUGGING  
FILE 24 17 10W  
BOOK PAGE 91 8

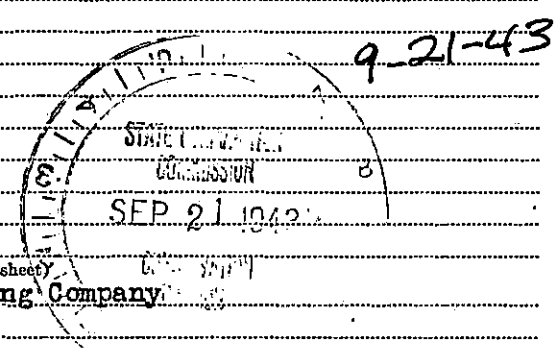

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to Beardmore Drilling Company  
Address 606 Petroleum Building, Wichita, 2, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
F. W. Feldner (employee of owner) or ~~owner or operator~~ of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *F. W. Feldner*  
606 Petroleum Building, Wichita 2, Kansas.  
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of September, 1943.

My commission expires December 6, 1943.  
Jane E. Macaulay  
Notary Public.

15.053.01275.00.00

BUNCE NO. 1 WELL

NW SE Sec. 24-17S-10W,  
Ellsworth County, Kansas.

Drilled for: Mid Plains Oil Corporation et al  
Drilled by: Beardmore Drilling Company

Casing Record:

8-5/8" 215'  
5-1/2" 3244'

Drilling Commenced: May 22, 1943.  
Drilling Completed: June 15, 1943.

<u>FORMATION</u>	<u>DEPTH</u>
surface	215
shale	500
shale & lime	1075
shale & shells	1250
shale & lime	1365
shale & shells	1600
shale & lime	1655
lime - broken	1715
shale & lime	2060
shale & shells	2330
shale & lime	2475
lime	2585
shale & lime	2625
lime - broken	2735
churt	2745
lime	2825
shale & lime	2995
lime - soft	3005
lime - broken	3200
lime	3244
lime - core	3249
lime - core	3252
lime	3280 T.D.

STATE OF KANSAS

SS,

COUNTY OF SEDGWICK

I, the undersigned, being duly sworn on oath, state that the above and within statement is a true and correct record and log of the well drilled on the location above described, to the best of my knowledge and belief.

*[Signature]*

Subscribed and sworn to before me this 31st day of August, 1943.

*Jane E Macaulley*  
Notary Public

My Commission Expires:  
December 6, 1943.

FILE 24 17 10W  
BOOK PAGE 91 100 8

