



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

P.O. Box 17027 3830 S. Meridian  
WICHITA, KANSAS 67217

RECEIVED  
STATE CORPORATION COMMISSION

JUN 20 1974

CONSERVATION DIVISION  
Wichita, Kansas

6-20-74

VERBAL PERMIT FORM  
(To Be Filed By Plugging Agent)

J. Lewis Brock  
Administrator  
500 Insurance Building  
Wichita, Kansas 67202

Dear Sir:

Mr. Lahr of Pate has this

date requested permission to plug the following described well:

Mr. Lahr guarantees payment of the plugging fee.

Operator's full Name: Pate-Dombaugh Petro & Martin Explor.

Complete Address: 502 Union Center, Wichita, Kansas

Lease Name: Hey Well No. A-1

Location: C NE SE Sec. 28 Twp. 22 Rge. 25 XX (E)(W)

County: Hoigeman Total Depth 41428' Oil Well

Gas Well      Input Well      SWD Well      D & A X Lost Hole     

Mr. Lahr was instructed to plug the well as follows:

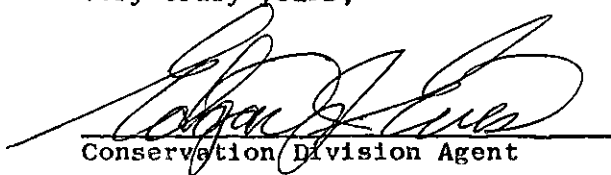
8 5/8" to 385' circulated w/ cement. Mud 4242' to 800'

Spot 35 sacks cement 800' to 700' Mud 700' to 385'

Spot 35 sacks cement 385' to 285' Mud 285' to 45'

Plug, Huffs & 15 sacks cement 45' to 0'.

Very truly yours,

  
Conservation Division Agent