

15-185-30247-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County. Sec. 8 Twp. 23S Rge. (E) 11 (W)

Location as "NE/CNW/SW" or footage from lines SW NW SW

Lease Owner Gabbert-Jones, Inc.
Lease Name Brock Well No. 1

Office Address 514 Orpheum Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 14 19 66

Application for plugging filed (5/14/66 by phone) May 18, 19 66

Application for plugging approved May 14, 19 66


Plugging commenced May 14, 19 66

Plugging completed May 14, 19 66

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

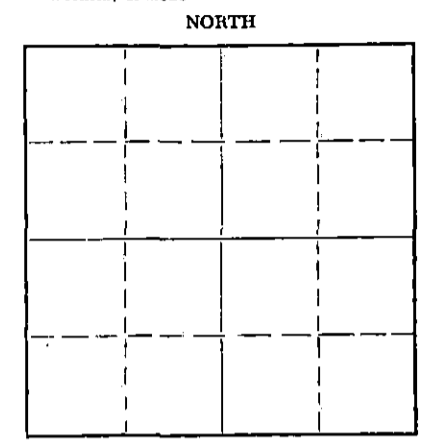

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3730 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	282	8-5/8	282	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 260 ft. Set first plug @ 260 ft. w/1/3 sack of hulls and 25 sacks cement. Filled hole with heavy mud to 40 ft. Set second plug @ 40 ft. w/1/3 sack hulls and 10 sacks of cement. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

MAY 24 1966

CONSERVATION DIVISION
Wichita, Kansas

5-24-66

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 514 Orpheum Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. E. Hall (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Hall

514 Orpheum Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 23 day of May, 19 66

Barbara J. Layton
Barbara J. Layton Notary Public.

My commission expires February 1, 1968

15-185-30247-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

BROCK #1
SW NW SW Section 8-23S-11W
Stafford County, Kansas

Commenced: May 5, 1966
Completed: May 14, 1966

OPERATOR - Gabbert-Jones, Inc.

DEPTH		FORMATION	REMARKS
From	To		
0	90	Sand	
90	282	Red bed and shale	Ran 11 joints of 8-5/8" casing, set @ 282' w/275 sacks cement.
282	1345	Red bed and shale	
1345	1640	Shale and shells	
1640	1830	Lime and shale	
1830	1990	Lime	
1990	2350	Lime and shale	
2350	2510	Shale	
2510	2931	Lime and shale	
2931	3077	Lime	
3077	3302	Lime and shale	
3302	3614	Lime	
3614	3650	Cherty lime	
3650	3695	Cherty lime and shale	
3695	3730	Lime	
3730	TD		Dry and abandoned.

RECEIVED
CONSERVATION COMMISSION

MAY 24 1966

CONSERVATION DIVISION
Wichita, Kansas

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the SW NW SW Section 8-23S-11W, Stafford County, Kansas, to the best of my knowledge and belief.




E. E. HALL

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 23rd day of May, 1966 personally appeared E. E. HALL, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


Barbara J. Layton, Notary Public

My Commission Expires February 1, 1968.