

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Stafford County. Sec. 17 Twp. 23S Rge. 11 (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SE SW

Lease Owner J. J. Lynn

Lease Name Reiter Et Al Well No. 1

Office Address Box 2199, Abilene, Texas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed August 9 19 54

Application for plugging filed August 9 19 54

Application for plugging approved August 9 19 54


Plugging commenced August 9 19 54

Plugging completed August 9 19 54

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

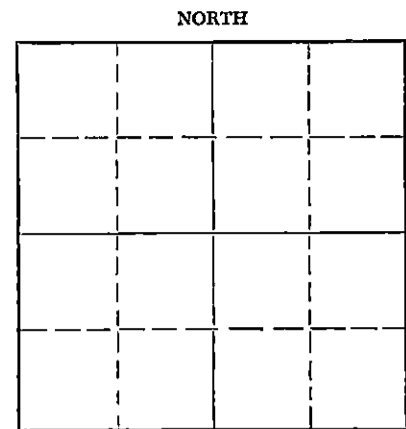

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Depth to top Bottom Total Depth of Well 3809' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	300'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud through drill pipe to 270', cemented with 20 sacks of cement.  
Filled hole within 30' of the surface, set Halliburton plug, cemented to the top of the surface with 10 sacks of cement.

8-17-54

FILED  
STATE OF KANSAS  
AUG 17 1954  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company

Address Sterling, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.  
Rollin Mead (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rollin Mead

Sterling, Kansas


(Address)

SUBSCRIBED AND SWORN to before me this 11th day of August, 19 54

My Commission Expires Sept. 17, 1957

My commission expires

*[Signature]*  
Notary Public.



# STERLING DRILLING CO.

15-185-00885-0000

STERLING, KANSAS

WELL LOG

REITER, ET AL #1

Location: SW SE SW, Section 17-23S-11,  
Stafford County, Kansas

OWNER: J. J. Lynn

ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: 7-29-54 (w.r.)

COMPLETED: 8-9-54 (w.r.)

TOTAL DEPTH: 3809' (w.r.)

## LOG

0-300	Sand & Shale
300-345	Red Bed
345-1160	Red Bed, Shale & Shells
1160-1500	Shale & Shells
1500-2360	Shale & Lime
2360-2535	Shale & Shells
2535-2945	Shale & Lime
2945-3135	Lime
3135-3335	Shale & Lime
3335-3620	Lime
3620-3705	Lime & Cong.
3705-3708	Cong.
3708-3727	Viola Lime
3727-3769	Simpson
3769-3809	Arb. Lime, T.D.

## CASING RECORD

Ran 300' of 8-5/8" Casing, set with 200 sacks of cement.

## PRODUCTION

Plugged & abandoned

**RECEIVED**  
STATE CORPORATION COMMISSION

AUG 13 1954

CONSERVATION DIVISION  
Wichita, Kansas

