

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 18 Twp. 22S Rge. (E) 12 (W)

Location as "NE/CNW/WSW" or footage from lines C NW SW NE

Lease Owner Rains & Williamson Oil Co.

Lease Name DRACH Well No. 1

Office Address 1425 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed December 2 19 64

Application for plugging filed December 2 19 64

Application for plugging approved December 2 19 64


Plugging commenced December 2 19 64

Plugging completed December 2 19 64

Reason for abandonment of well or producing formation no oil or gas found
in commercial quantities.

If a producing well is abandoned, date of last production - - 19 -

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

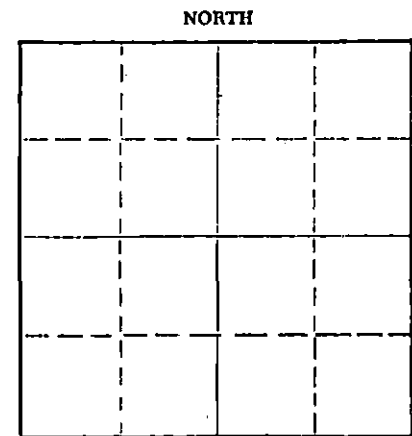

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Kansas

Producing formation - - Depth to top - - Bottom - - Total Depth of Well 3747 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT
				8-5/8"	282'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from - - feet to - - feet for each plug set.

Push plug and hulls to 275', cement through drill pipe with 25 sacks cement. Mud back to 40'. Set solid bridge and capped with 10 sacks cement.

12-8-64

RECEIVED
STATE CORPORATION COMMISSION

DEC 8 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co.

Address 1425 Wichita Plaza, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Wilson Rains (~~owner or operator~~) (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
Wilson Rains
1425 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of December, 19 64

Shirley Keek
Notary Public.

My commission expires January 8, 1968

ROTARY DRILLING LOG

Operator: Rains & Williamson Oil Co. Contractor: Rains & Williamson
 #1 Drach Oil Co.
 C NW SW NE Sec. 18-22S-12W Commenced: 11-23-64
 Stafford County, Kansas Completed: 12-2-64
 Remarks: Set 232' 8-5/8" surface casing with 225 sacks GL3 cement.

FORMATIONS:

Surface Soil & Clay	40'
Sand & Shale	200'
Shale & Red Bed	693'
Anhydrite	713'
Shale & Shells	1485'
Shale & Lime	1675'
Lime & Shale	2105'
Shale & Lime	2490'
Shale & Lime Streaks	2965'
Lime & Shale	3160'
Lime	3595'
Lime & Chert	3665'
Lime	3680'
Lime & sand	3705'
Lime	3747'

We certify the above log is true and correct to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO.

Wilson Rains
 Wilson Rains, Partner

Subscribed and sworn to before me, a Notary Public in and for the State of Kansas, County of Sedgwick, this 7th day of December, 1964.

My Commission Expires:
 January 8, 1968

Shirley Keck
 Shirley Keck, Notary Public