

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Strike out upper line
when reporting plug-
ging off formations.

NORTH

	X		

Locate well correctly on above
Section Plat

Stafford County. Sec. 16 Twp. 22s Rge. (E) 12 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines... NW/4 SE/4 NW/4

Lease Owner... Stanolind Oil & Gas Company

Lease Name... Wm. Harms Well No. 3

Office Address... Box 591, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date, well completed... November 14, 19 43

Application for plugging filed... January 16, 19 43

Application for plugging approved... January 20, 19 43

Plugging Commenced... February 12, 19 43

Plugging Completed... February 12, 19 43

Reason for abandonment of well or producing formation... Dry Hole
Abandon Input Well because of hole caving in.

If a producing well is abandoned, date of last production... 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well... Mr. C. T. Alexander

Producing formation... Arbuckle Depth to top... 3839 Bottom... 4395 Total Depth of Well... 4395 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lensing	N.S.O.	3365		8 5/8"	249'7"	None
Conglomerate	N.S.O.	3642		5 1/2"	3906'2"	2468'
Arbuckle	N.S.O.	3839				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from... feet to... feet for each plug set.

Cement from 4395' to 3861';
Mud from 3861' to 253'; pumped in.
Cement from 253' to 233'; 10 Sacks dumped
Mud from 233' to 26'; pumped in
Cement from 26' to 6'; 5 sacks dumped
Mud from 6' to surface; dumped in.

FILE # 18-228-12W
BOOK PAGE 61-LINE 14-

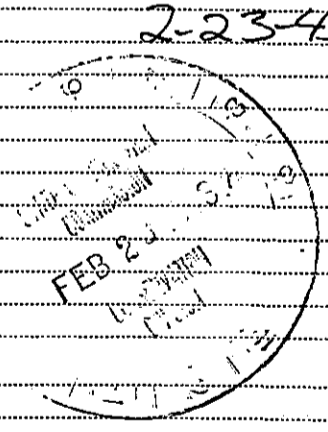

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to... Mr. D. C. Harman
Address... Box 591, Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.
H. G. Nething (employee of owner) or ~~owner~~ of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. G. Nething Fld. Supt.
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22nd day of February, 19 43

Marianne Roth Notary Public.

My commission expires December 22, 1945