

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stafford County, Sec. 19 Twp. 22S Rge. 12 (E)/(W)

Location as "NE/CNW%SW%" or footage from lines SW/SW/SE

Lease Owner Transit Corporation

Lease Name Krankenberg Well No. #1

Office Address 1316-9th Street, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed Yes 19

Application for plugging approved Yes 19


Plugging commenced 5-28 19 58

Plugging completed 6-6-58 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

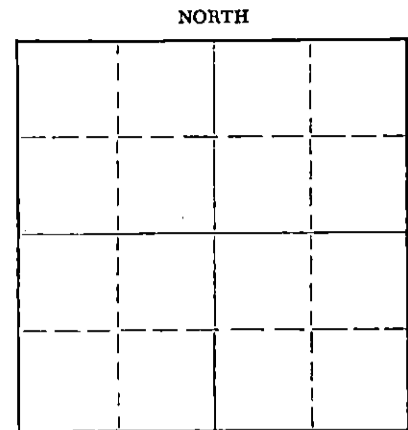

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Frank Broadfoot

Producing formation Depth to top Bottom Total Depth of Well 3761' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"		
				5 1/2"		2912'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured into T.D. 3761'.  
Plugging started 5-28-58. Finished 6-6-58.  
Plugged off bottom with sand to 3700' and dumped 5 sacks cement.  
Shot 5 1/2" casing at 2912'. Circulated and spotted oil. Mixed mud.  
Bailed down hole to 250'. Set rock bridge and pumped in 20 sacks cement.  
Pumped in mud to 150'. Set rock bridge and put in 25 sacks. Filled hole with mud, set rock bridge and capped well with 15 sacks cement.  
Well completed.

RECEIVED  
STATE CORPORATION COMMISSION

JUN 12 1958

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co. (If additional description is necessary, use BACK of this sheet)  
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J O Forbes  
Box 221, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 10th day of June, 1958

My commission expires November 8, 1960.

Betty S. Edman  
Notary Public.

PLUGGING  
FILE SEC 19, T 22, R 12 W  
BOOK PAGE 103 LINE 35

## DRILLER'S WELL LOG

Transit Corporation-Lion Oil Co., Krankenberg #1 located in SW SW SE  
Sec. 19-22S-12W, Stafford Co., Kansas

Commenced: January 3, 1956  
Completed: January 17, 1956  
Elevation: 1877 KB

Casing 8 5/8" @ 229'  
Cemented 150 sacks

<u>Formation</u>	<u>From</u>	<u>To</u>
Sand	0	120
Sand and gravel	120	180
Shells	180	229
Red bed shells	229	640
Shale and shells	640	1515
Anhydrite	1515	1560
Shale and lime	1560	1725
Lime and shale	1725	1990
Shale and lime	1990	2200
Lime and shale	2200	2360
Shale and lime	2360	2570
Shale and shells	2570	2695
Shale and lime	2695	2885
Shale and shells	2885	2960
Lime and shale	2960	3114
Lime	3114	3210
Lime and shale	3210	3290
Lime	3290	3638
Conglomerate	3638	3665
Chert	3665	3700
Sand and shale	3700	3759
Lime	3759	3761 TD

Summary of Formation

Heebner	3197'
Toronto	3215'
Douglas	3232'
Brown Lime	3330'
Lansing K.C.	3348'
Base K.C.	3573'
Viola	3630'
Simpson Sh.	3695'
Simpson Dolo.	3705'
Simpson Sand	3727'
Arbuckle	3757'

I hereby certify the foregoing to be a true and accurate Driller's Log of  
the formation encountered in the above well.

TRANSIT CORPORATION

By Paul E. Gators

Subscribed and sworn to before me  
this 28th day of May, 1958.

My Commission expires May 17, 1962.

Malcolm Starn  
Notary Public

RECEIVED  
CORPORATION COMMISSION

JUN 2 1958  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
SEC 19 T 22R 12W  
BOOK PAGE 103 LINE 35