

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Stafford County, Sec. 15 Twp. 22 Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines NE NE NE

Lease Owner Stearns Petroleum, Inc.

Lease Name Gore Well No. 2

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed February 15 19 54

Application for plugging filed February 15 19 54

Application for plugging approved February 15 19 54


Plugging commenced February 15 19 54

Plugging completed February 15 19 54

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

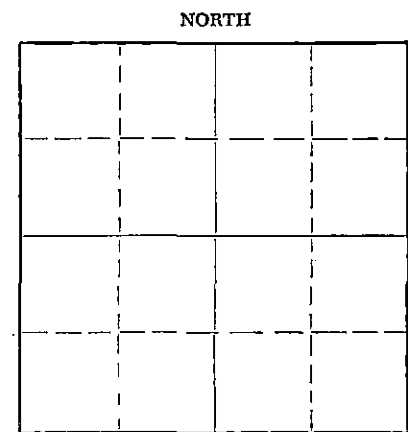

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Depth to top Bottom Total Depth of Well 3815 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	262.04	None
				(Cemented top to bottom)		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3815 feet to 0 feet for each plug set.

Filled hole with heavy mud to 240'
Set a bridging plug at 240'
Placed 1/2 sack hulls on top of plug.
Placed 20 sacks cement on top of hulls.
Filled hole with heavy mud to 40'.
Placed 1/2 sack hulls on top of plug.
Placed 5 sacks cement on top of hulls
to top of ground.

2-23-54

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stearns Petroleum, Inc.

Address Russell, Kansas

STATE OF KANSAS COUNTY OF RUSSELL ss.
Harold J. Urbanek (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Harold Urbanek

Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of February, 19 54

My commission expires March 3, 1957

Zita Denning Notary Public.



- GORE #2 WELL -

Operator: Stearns Petroleum, Inc.
 Contractor: Stearns Petroleum, Inc.
 Commencement Date: February 2, 1954
 Completion Date: February 15, 1954

Location: NE/4 NE/4 NE/4
 Section 15-22-14,
 Stafford County, Kansas

Casing Record:

8 5/8" 262.04' Cemented with 150 sacks.

WELL LOG

Surface Clay and Sand	0	30
Sand	30	200
Shale and Shells	200	247
Shale and Sand	247	615
Red Bed and Sand	615	824
Anhydrite	824	850
Red Rock	850	955
Salt and Shale	955	1400
Shale	1400	1700
Lime and Shale	1700	3524
Lime	3524	3581
Lime and Shale	3581	3703
Conglomerate	3703	3720
Viola	3720	3750
Simpson	3750	3802
Arbuckle	3802	3815
Total Depth:	3815	

STATE OF KANSAS)
) SS:
 COUNTY OF RUSSELL)

I hereby certify that the above information is true and correct to the best of my knowledge.

Harold Arbuckle

SUBSCRIBED AND SWORN to before me, a Notary Public, this 18th day of February, 1954.

Zida Dennis
 Notary Public

My Commission Expires:

March 3, 1957

