


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

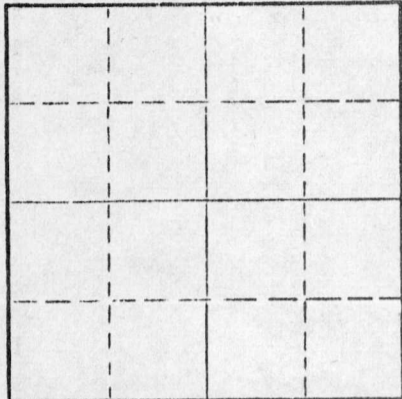

Locate well correctly on above
Section Plat

Pawnee County, Sec. 32 Twp. 22 Rge. 15 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW NW

Lease Owner D. J. Iannitti

Lease Name Barstow Well No. A-1

Office Address P. O. Box 387 Hoisington, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19 _____

Application for plugging filed 2-6-67 19 _____

Application for plugging approved 2-7-67 19 _____

Plugging commenced 2-10-67 19 _____

Plugging completed 3-1-67 19 _____

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well _____


Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well PB 3790 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	225	None
				5 1/2	None	2963

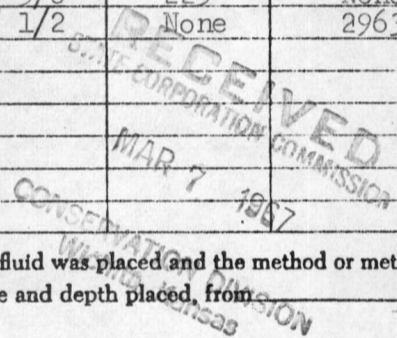

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Cleaned out cellar. Rigged up - 8 5/8 making water. 3-7-67

Pushed plug to 3500'. Dumped 30' of sand. Dumped 5 sacks of cement. Working pipe at 3335'.

Working pipe. Circulating.

Working pipe. Circulating. Spotted 70 bbl. of oil.

Working pipe. Shot pipe at 3045' - 2950'. Pulling pipe.

Cleaned out cellar. Shut in water. Sun Oil Well Cementing, Inc. squeezed well with 40 sacks of mud and 85 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 3 day of March, 19 67

[Signature]
Notary Public.

My commission expires May 27, 1969

*This well now belongs to
 H. J. Lammitt
 P.O. Box 387
 Nowington, Kansas*

WELL LOG

OWNER:
 LEASE:
 LOCATION:
 COMMENCED:
 COMPLETED:
 CASING:

Hellar Drilling Company, Inc.
 #1 Barstow "A"
 SE NW NW 32-22-15W
 Pawnee County, Kansas
 December 8, 1959
 December 20, 1959
 8-5/8" @ 221' w/200 sacks cement
 5-1/2" @ 4024' w/150 sacks cement

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 7 1967
 CONSERVATION DIVISION
 Wichita, Kansas

0 - 222	Sand & shale
222 - 400	Shale
400 - 495	Sand
495 - 940	Red bed & sand
940 - 1500	Shale & sand
1500 - 1829	Shale
1829 - 1925	Salt section
1925 - 2075	Ft. Riley lime
2075 - 2277	Lime
2277 - 2933	Lime & shale
2933 - 3090	Topeka Lime & shale brks.
3090 - 3225	Lime & shale
3225 - 3385	Topeka lime
3385 - 3495	Lime & shale
3495 - 3528	Shale
3528 - 3575	Lime
3575 - 3647	Lansing-Kansas City Lime
3647 - 3835	Lime
3835 - 3882	Lime & Conglomerate
3882 - 3927	Chert
3927 - 3961	Chert & sandy shale
3961 - 3963	Shale
3963 - 4025	Arbuckle
4025	Rotary Total Depth

STATE OF KANSAS) SS
 COUNTY OF SEDGWICK)

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 BARSTOW "A", located in the SE NW NW of Section 32-22-15W, Pawnee County, Kansas, as reflected by the files of the HELLAR DRILLING COMPANY, INC.

HELLAR DRILLING COMPANY, INC.

BY *D. L. Hellar*
 D. L. Hellar President

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 28th day of December, 1959.

 Notary Public

My commission expires March 6, 1961.