

15 185-20475-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County, Sec. 36 Twp. 23 Rge. 11 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
SW NE NE

Lease Owner Stelbar Oil Corporation, Inc.
Lease Name Zenith Unit #1 Smart Well No. _____
Office Address Wichita, Kansas
Character of Well (Completed as Oil, Gas or Dry Hole) _____

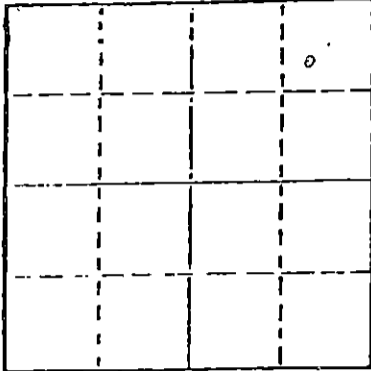

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 12/20/77 _____ 19____
Plugging completed 1/10/78 _____ 19____
Reason for abandonment of well or producing formation
depleted.

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owens
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3688
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	270	none
				5 1/2"	3687	3019'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded to 3660' and ran 5 sacks cement. Loaded hole with salt water, shot pipe at 3017', pulled 95 joints. Pumped 3 sacks hulls, 20 sacks gel and plug and 100 sacks cement.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of Jan., 19 78

Margaret Melcher
Notary Public.

My commission expires



RECEIVED
STATE CORPORATION COMMISSION
JAN 18 1978

CONSERVATION DIV. S. OR
Wichita, Kansas

1-18-78

DRILLERS LOG

15-185-26475-0000

ZENITH UNIT #1 SMART
SW NE NE Section 36-23S-11W
Stafford County, Kansas

OPERATOR: Stelbar Oil Corporation
Suite 950, 200 West Douglas
Wichita, Kansas 67202

CONTRACTOR: Dunne-Gardner Petroleum, Inc.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

COMMENCED: January 15, 1974

COMPLETED: January 20, 1974

CASING RECORD: 8-5/8" @ 270' w/225 sx
5-1/2" @ 3687' w/100 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	100	Clay and sand
100	270	Clay and blue shale
270	484	Shale and red bed
484	499	Anhydrite
499	1413	Shale and shells
1413	3315	Lime and shale
3315	3688	Lime
3688		Rotary total depth


STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.


Don Gardner

Subscribed and sworn to before me this 21st day of January, 1974.

My commission expires:
December 14, 1977


Notary Public

RECEIVED
STATE CORPORATION COMMISSION
SEP 28 1977
CONSERVATION DIVISION
Wichita, Kansas