

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

# Hodgeman County. Sec. 16 Twp. 22 Rge. 22 (E) (W)

Location as "NE/CNW&SW" or footage from lines C SW NW

Lease Owner Specter Pipe & Supply Company, Inc

Lease Name Lingenfelder Well No. 1

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry: Hole) oil

Date well completed 2-19-63 1963

Application for plugging filed June 8, 1970 1970

Application for plugging approved June 10, 1970 1970


Plugging commenced June, 29, 1970 1970

Plugging completed July, 6, 1970 1970

Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

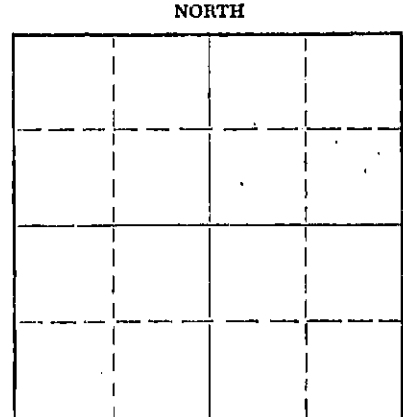

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Edgar Eves

Producing formation Mississippi Depth to top 4471 Bottom 4475 Total Depth of Well 4483 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" oD	308 ft.	none
				5 1/2" oD	4475 ft.	3628 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged, back with sand to 4470- feet, dumped 5- sacks Cement.  
Pumped 5- sacks Mud & 80- sacks Cement at 800- feet.  
Pumped 5- sacks Mud & 30- sacks Cement at 300- feet.  
10- sacks on top.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 14 1970  
CONSERVATION DIVISION  
Wichita, Kansas

7-14-70

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Company, No. 457

Address R.Rt. 4 Great Bend, Kansas, 67530

STATE OF Kansas COUNTY OF Russell, ss.

Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 10<sup>th</sup> day of July, 1970

My commission expires May 21, 1971  
Wilma M. Lindahl Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


COPY

Company- N. APPLEMAN CO.  
Farm- Lingerfelder No. 1

SEC. 16 T. 22 R. 22W  
C SW NW

Total Depth. 4493  
Comm. 2-7-63 Comp. 2-19-63  
Shot or Treated.  
Contractor. Gabbert-Jones Inc.  
Issued. 9-7-63

County Hodgeman  
KANSAS



CASINO:  
8 5/8" 308' cem w/225 bx.  
5 1/2" 4475' cem w/100 bx.

Elevation. 2250' KB

Production. 96 BOED, NW

Figures Indicate Bottom of Formations.

post rock & clay	70
shale & shells	308
clay	580
redbed	790
lime	840
sand & redbed	1270
redbed & shale	1300
lime & shale	1405
shale & shells	1760
shale & lime	2205
lime	2640
lime & shale	3272
lime	3349
lime & shale	3885
lime	4475
lime ?	4493 RTD
Total Depth	

TOPS: SAMPLE	
Perm	540
Blaine	765
Oloretta	867
Cimmarron	1410
Base St. Corral	1455
Wellington	1855
Chase	2354
Wabaunsee	3250
Shaw	3457
Heebner	3800
Toronto	3815
Douglas	3844
Lansing	3866
Base Kansas City	4162
Marmaton	4236
Ft. Scott	4324
Cherokee	4384
Mississippi	4471

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 10 1970  
CONSERVATION DIVISION  
Wichita, Kansas