


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

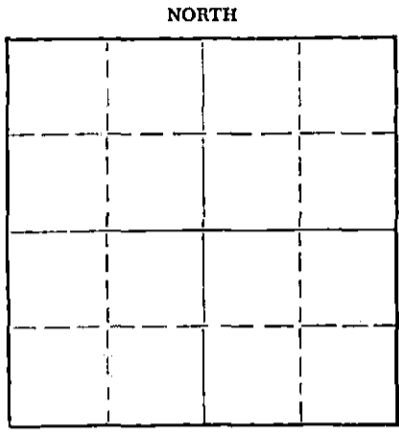

Locate well correctly on above Section Plat

Stafford County, Sec. 9 Twp. 22S Rge. (X) 14 (W)
Location as "NE/CNW/SW" or footage from lines NW SW NE
Lease Owner John C. Graves, et al
Lease Name Dralle Well No. 1
Office Address 412 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 26, 19 65
Application for plugging filed August 26, 19 65
Application for plugging approved August 26, 19 65
Plugging commenced August 26, 19 65
Plugging completed August 26, 19 65
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving, Pratt, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3920 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up with heavy mud to 210 feet. Followed by wooden plug and 1/4 sack hulls. Placed 25 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed by wooden plug, 1/4 sack hulls and 10 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

SEP 1 1965
9-1-65
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Graves Drilling Co., Inc.
Address 412 Union Center, Wichita, Kansas

STATE OF KANSAS COUNTY OF BUTLER, ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *John C. Graves*
412 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of August, 19 65

My commission expires April 30, 1967 Betty Brandt Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: John C. Graves, et al DRILLING COMMENCED: August 20, 1965
 412 Union Center
 Wichita, Kansas

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: August 26, 1965
 412 Union Center
 Wichita, Kansas

CASING RECORD: 5 Jts. 222' 8-5/8" LOCATION: Dralle No. 1
 cemented with 220 sacks NW SW NE
 Section 9-22S-14W
 Stafford County, Kansas

0 - 220 Sand, shale & lime
 220 - 312 Sand, shale & shells
 312 - 400 Sand
 400 - 655 Shale & shells
 655 - 862 Shale, shells & red bed
 862 - 885 Anhydrite
 885 - 1740 Shale & shells
 1740 - 2491 Lime & shale
 2491 - 2585 Shale & lime
 2585 - 2605 Lime & shale
 2605 - 2968 Shale & lime
 2968 - 3179 Line
 3179 - 3533 Line & shale
 3533 - 3735 Line
 3735 - 3792 Line & shale
 3792 - 3871 Line
 3871 - 3920 Line & sand
 3920 Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 1 1965
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By John C. Graves
President

STATE OF KANSAS)
) SS:
BUTLER COUNTY)

Subscribed and sworn to before me, a Notary Public, this 30th day of August, 1965.

Betty Brandt
Betty Brandt Notary Public

My commission expires: April 30, 1967