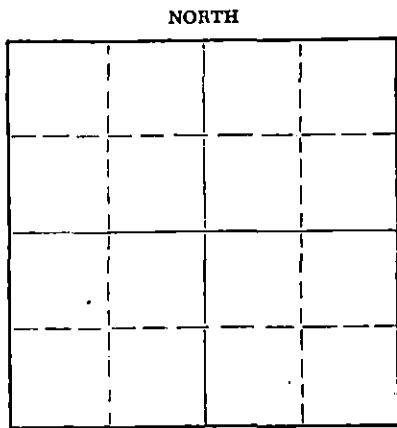


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above
Section Plot

Stafford County. Sec. 21 Twp. 22S Rge. 13W (E) (W)
Location as "NE/CNW/SW" or footage from lines SW NE SW
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name Eleanor Rusco Well No. 1
Office Address 800 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed October 27, 1963 19
Application for plugging filed January 13, 1965 19
Application for plugging approved January 14, 1965 19
Plugging commenced January 14, 1965 19
Plugging completed January 19, 1965 19
Reason for abandonment of well or producing formation non-productive in commercial quantities
If a producing well is abandoned, date of last production June 1, 1964 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation Arbuckle Depth to top 3832 Bottom Total Depth of Well 3837 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			8 5/8"	8 5/8"	323'	Cement 4d
				5 1/2"	3834	2800'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with sand from 3837 feet to 3825 feet; ran 5 sacks of cement from 3825 to 3790 feet; set plug at 300 feet; rock bridge from 300 feet to 290 feet; ran 3 sacks of cement and let set 3 hours; bailed out water and ran 22 sacks of cement from 290 feet to 215 feet. Mudded from 215 feet to 40 feet; rock and 10 sacks of cement from 40 feet to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

FEB 2 1965

2-2-65

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn and Smith Pipe Pulling Company
Address Box 156, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dwight J. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

800 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of February, 1965

My commission expires August 10, 1965

Virginia Mundell

Notary Public.

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: October 17, 1963

Contractor: Quaker Drilling Co., Inc.

Completed: October 27, 1963

Alpine's No. 1 Eleanor Rusco
SW NE SW Section 21-22S-13W
Stafford County, Kansas

Elevation: 1903 K.B.

Casing Record:

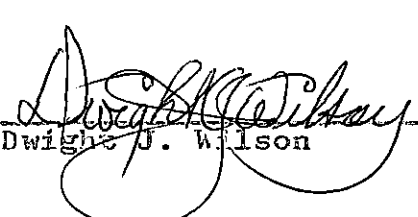
8 5/8 inch casing set at 323 feet with 275 sacks cement
5 1/2 inch casing set at 3834 feet with 150 sacks cement

(FIGURES INDICATE THE BOTTOM OF THE FORMATION)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>
Clay	35	Heebner Shale 3276 -1373
Sand and Gravel	265	Brown Lime 3404 -1501
Red Shale and Shells	323	Lansing-Kansas City 3427 -1524
Red Bed	758	Base of Kansas City 3638 -1735
Anhydrite	783	Viola 3708 -1805
Shale and Shells	1660	Simpson Shale 3773 -1870
Lime and Shale	3085	Arbuckle 3832 -1929
Lime	3250	Rotary Total Depth 3837 -1834
Lime and Shale	3345	
Lime	3750	
Chert	3781	
Lime and Shale	3837	

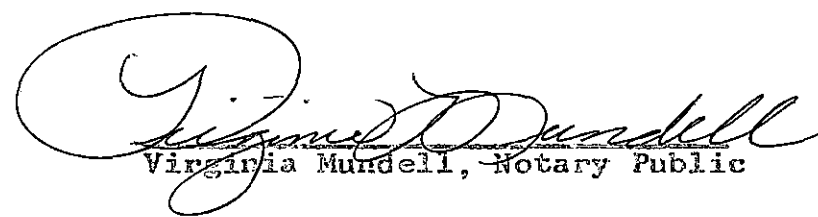
We hereby certify the foregoing to be a true and correct copy of the driller's log of the well drilled in the SW NE SW of Section 21, Township 22 South, Range 13 West, Stafford County, Kansas.

QUAKER DRILLING CO., INC.

By: 

Dwight J. Wilson

SUBSCRIBED AND SWORN TO before me a Notary Public this 24th day of November, 1963.


Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1965

RECEIVED
STATE CORPORATION COMMISSION

JAN 14 1965

CONSERVATION DIVISION
Wichita, Kansas