

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 24 Twp. 22 Rge. 14 (E) W (W)

Location as "NE/CNWxSWx" or footage from lines _____
Lease Owner Spector Pipe and Supply Inc.
Lease Name Eggebrecht Well No. 3
Office Address Box 169, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 2-25-52 19____
Application for plugging filed 4-3-66 19____
Application for plugging approved 4-4-66 19____
Plugging commenced April 24, 1966 19____
Plugging completed April 27, 1966 19____
Reason for abandonment of well or producing formation _____

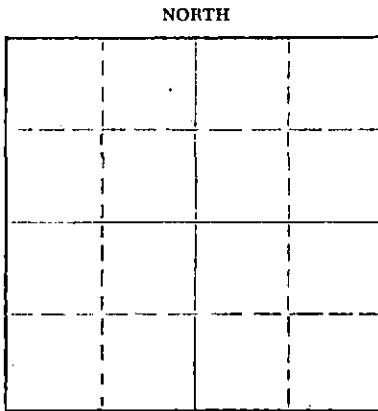

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Eving
Producing formation Arbuckle Depth to top 3788' Bottom 3790' Total Depth of Well 3798 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	415'	none
				5 1/2"	3790'	2920.49'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back to 3775 feet and dumped 5 sacks of cement. Set Rock Bridge at 300 feet and dumped 25 sacks of cement. Mudded hole to 40 feet. Set Rock Bridge and dumped 10 sacks.

RECEIVED
STATE CORPORATION COMMISSION

MAY 2 - 1966
5-2-66

Name of Plugging Contractor Ralph Lynch Casing and Pulling Co.
Address R, Rt 4, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Spector Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 28th day of April, 1966

My commission expires March 9, 1970
W. W. Dawson Notary Public.

WELL LOG COURTESY OF THE KANSAS GEOLOGICAL SURVEY
 500 East 10th Street, Wichita, Kansas


COPY

Company: CITIES SERVICE OIL CO.
 Farm: Eggebrecht No. 3

SEC. 24 T. 22 R. 14N
 NW 5/4 NW
 990' N. & 330' E. of 1/4 corner

Total Depth. 3798
 Comm. 2-8-52 Comp. 2-25-52
 Shot or Traced?
 Contractor. Holm Drilg. Co.
 Issued. 5-3-52

County Stafford
 KANSAS



CASE NO:
 8 5/8" 415' com. w/300 sx
 5 1/2" 3790' com. w/150 sx

Effective 1227

Production. Phy. Pot. 44 BO
 12% wtr 24 hrs.

Figures in parentheses indicate depth of formation.

sand	230
shale	417
red bed & shale	680
anhydrite	805
shale	1700
lime & shale	3235
lime	3300
lime & shale	3499
lime	3555
lime & shale	3608
lime	3630
lime & shale	3710
lime & chert	3745
lime & shale	3791
3791 RTD = 3790 SLM	
lime	3798
Total Depth	

Tops: Corr.	
Brown Limestone	3425
Lansing	3436
Viola	3709
Simpson	3745
Arbuckle	3788

Penetration 10'

DST: 3588-99' open 1 hr.
 gas to surface in 4 mins.
 rec. 50' mud with show of
 oil, 146 LCF gas; BHP 555#
 in 15 mins.

DST: 3599-3608, open 1 hr.
 gas to surface in 35 mins.
 rec. 90' mud with fair show
 of free oil; BHP 520' in
 125 mins.

DST: 3617-26' open 1 hr.
 rec. 65' oily mud; BHP 790#
 in 15 mins.

Fillup: 195' oil in 2 hrs.
 296' oil in 5 hrs. 20 mins.
 363' oil in 5 hrs. 35 mins.
 4053' oil in 16 hrs.

RECEIVED
 STATE CORPORATION COMMISSION
 APR 4 1966
 CONSERVATION DIVISION
 Wichita, Kansas