


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

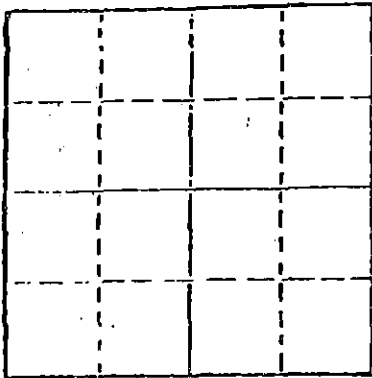

Locate well correctly on above
Section Plot

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3875'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud laden fluid 3875' to 485'
50 sacks cement @ 480
18 sacks cement @ 330
10 sacks cement @ 40
2 sacks cement in rat hole

2-25-80
STATE RECEIVED
FEB 25 1980
STATE CORPORATION COMMISSION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

STATE OF KANSAS COUNTY OF RUSSELL, ss.
Kelly Branum (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kelly Branum

Box 506, Russell, Kansas 67665


(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of February, 1980

Patricia L. Clark

Notary Public.

My commission expires October 2, 1983



EMPHASIS OIL OPERATIONS

P.O. Box 506
Russell, Kansas 67665

DRILLERS LOG

OPERATOR: Paramount Petroleum
Suite 505 Petroleum Bldg.
Wichita, Kansas 67202

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, Kansas 67665

LEASE: ~~Vandevore~~ ^{Devore} WELL: #1

LOCATION: NW SE NE
Section 24-22S-14W
Stafford County, KS

Total Depth: 3875'

Elevation;

Commenced: 2-6-80

Completed: 2-17-80

Casing: 8-5/8" @ 365'

Status: Dry hole


DEPTHS & FORMATIONS

(All measurements from K.B.)

Sand & Clay	30	Shale & Lime	2250
Shale & Sand	370	Lime & Shale	2890
Sand & Red Bed	600	Lime	3070
Shale	796	Lime & Shale	3765
Anhydrite	818	Lime & Chert	3856
Shale	1662	Lime (R.T.D.)	3875


STATE OF KANSAS
COUNTY OF RUSSELL)

I, Joe K. Branum, of Emphasis Oil Operations, state that the above and foregoing is a true and correct log of the above captioned well.


Joe K. Branum

Subscribed and sworn to before me this 19th day of February, 1980

My Commission Expires: October 2, 1982




Notary Public

RECEIVED
STATE CORPORATION COMMISSION

FEB 25 1980

CONSERVATION DIVISION
Topeka, Kansas