


Give All Information Completely
Make Required Affidavit
Mail Delivered Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above Section Plat

Stafford County, Sec. 19 Twp. 23 Rge. (E) 12 (W)
Location as "NE/CNW/SWK" or footage from lines NE NB NW
Lease Owner Rocket Drilling Company, Inc.
Lease Name Brown Well No. 1
Office Address 352 North Broadway, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 4 19 55
Application for plugging filed July 5 19 55
Application for plugging approved July 6 19 55
Plugging commenced July 4 19 55
Plugging completed July 4 19 55
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Warren H. Horner, Box 207, Great Bend, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3920 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	225'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set bottom plug @ 220' with 1/2 sack hulls and 20 sacks cement. Filled hole with mud to 35'. Set top plug with 1/2 sack hulls and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rocket Drilling Company, Inc.
Address 352 North Broadway, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
L. H. Myrick (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. H. Myrick
352 North Broadway, Wichita 2, Kansas
(Address)


SUBSCRIBED AND SWORN to before me this 11th day of July, 19 55
Patricia Mack Blume
STATE CORPORATION COMMISSION Notary Public.

My commission expires March 5, 1958

PLUGGING
FILE SEC 19 T 23 R 12 W
BOOK PAGE 131 LINE 41

JUL 12 1955
CONSERVATION DIVISION
Wichita, Kansas

7-12-55

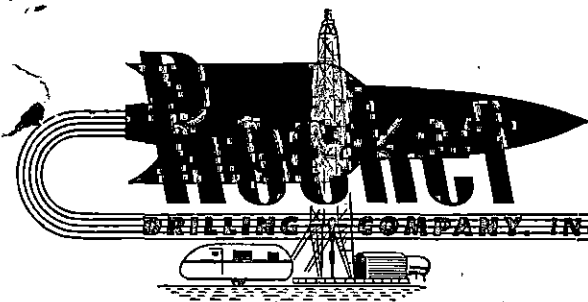

357 N. BROADWAY WICHITA, KANSAS

Rocket Drilling Company, Inc.
 #1 Brown
 NE NE NW Section 19-23-12W
 Stafford County, Kansas

15-185-00666-0000

Elevation: 1881 R.B.
 Spudded: June 22, 1955
 Rotary Completed: July 3, 1955
 Results: Dry and Abandoned
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

225° 8-5/8" O.D. 24# seamless casing cemented with 175 sacks cement.

DRILLERS LOG

Sand	0 to 165	Lime	2305
Clay & Shale	225	Lime & Shale	2465
Red Shale	660	Shale	2650
Sand	675	Shale & Lime	2760
Shale	731	Lime	2805
Anhydrite	760	Lime & Shale	3065
Shale, Shells & Salt	1465	Lime	3167
Shale & Lime	1550	Lime & Shale	3443
Sand	1565	Lime	3702
Lime	1780	Lime & Shale	3750
Sand	1795	Conglomerate & Viola	3816
Lime	1810	Chert	3829
Sand	1820	Chert & Shale	3874
Lime	2205	Simpson	3903
Sand	2215	Arbuckle	3920 TD

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I hereby certify that to the best of my knowledge and belief, the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

L. H. Myrick
 L. H. Myrick

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 8th day of July, 1955.

Patricia Mae Blume
 Notary Public

My commission expires: March 5, 1958

RECEIVED
 THE CORPORATION COMMISSION

PLUGGING
 PER SEC 19 T 23 R 12 W
 ROCK PAGE 13 / LINE 41

RECEIVED DIVISION
 WICHITA, KANSAS