

ROCKEY DR 19

SAME AS

WELL PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 211 No. Broadway Wichita, Kansas

Pawnee County, Sec. 4 Twp 22 Rge 16 (E) W (W)

Location as "NE/CNW/SW" or footage from lines Larned Townsite \*

Lease Owner Petroleum Management, Inc.

Lease Name Hanshaw Well No. SWD

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) SWD

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 6-7-61 19

Plugging completed 6-8-61 19

Reason for abandonment of well or producing formation \* NW/4 NW/4 NE/4 Sec 4-22S-16W

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

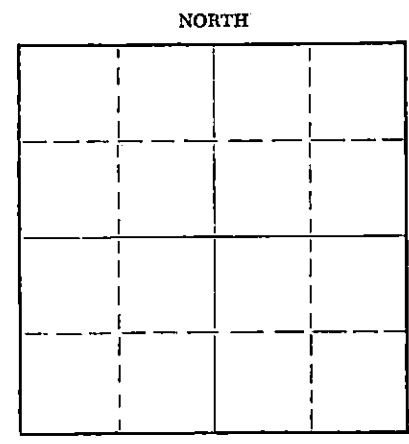

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot.

Producing formation Depth to top Bottom Total Depth of Well 4286' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Contains two rows of casing data.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4286', pushed plug to 3920' and ran 20 gal. of sand @ 3920'. Dumped 5 sacks of cement with dump bailer. Pulled 5 jts. of 5 1/2" casing. Dumped 3 1/2 yards of ready-mix down surface pipe, cement filled to base of cellar.

PLUGGING COMPLETE.

RECEIVED STATE CORPORATION COMMISSION

JUN 21 1961

CONSERVATION DIVISION

6-21-61

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company Address Chase, Kansas

STATE OF Kansas, COUNTY OF Rice, ss. Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Noel J. Knight Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of June, 1961

Melton J. Volin Notary Public

My commission expires May 20, 1964



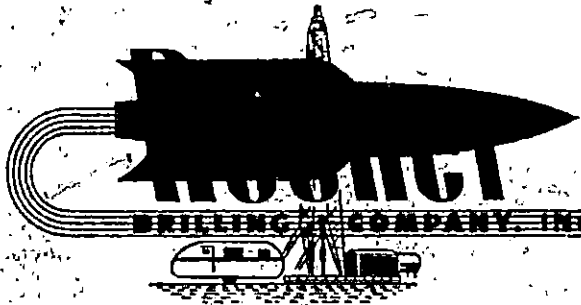

DRILLING COMPANY, INC. P.O. Box 31229 352 N. BROADWAY WICHITA, KANSAS

Rocket Drilling Company, Inc.  
 #1 Hanshaw  
 NW/4 NW/4 NE/4 Section 4-22S-16W  
 Pawnee County, Kansas

Elevation: 1992 Gr.; 1994 D.F.; 1997 R.B.  
 Spudded: May 22, 1956  
 Rotary Completed: June 3, 1956  
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

983' 8 5/8" O.D. 24# seamless casing cemented with 425 sacks cement  
 3943' 5 1/2" O.D. 14# seamless casing cemented with 450 sacks cement

DRILLERS LOG

Sand	0 to 130	Sand	2190
Clay & Shale	335	Lime	2315
Sand	345	Sand	2430
Shale	418	Lime & Shale	2440
"D" Sand	525	Shale	2625
Shale	580	Shale & Lime	2815
Sand	620	Shale	2960
Shale	977	Lime	3240
Anhydrite	1010	Shale & Lime	3325
Shale & Shells	1490	Lime	3433
Shale & Salt	1750	Shale & Lime	3537
Shale & Lime	1897	Lime & Shale	3597
Lime & Shale	2015	Lime	3764
Sand	2023	Lime & Shale	3835
Lime	2035	Shale	3848
Sand	2045	Simpson & Arbuckle	3852
Lime	2180	Arbuckle	4140

**RECEIVED**  
 STATE CORPORATION COMMISSION

MAY 31 1961

CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF KANSAS )  
 COUNTY OF SEDGWICK ) SS

I hereby certify that to the best of my knowledge and belief the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

*L. H. Myrick*  
 L. H. Myrick

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 7th day of June, 1956.

My commission expires:  
 10/28/1959

*Jeanne Helmer Greene*  
 Notary Public