

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

Pawnee County, Sec. 4 Twp. 22 Rge. 16 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines NE NE NW  
Lease Owner Morgenstern & Specter, Inc.  
Lease Name Peterson Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 6-21-61 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 6-28-61 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation Depleted.

NORTH

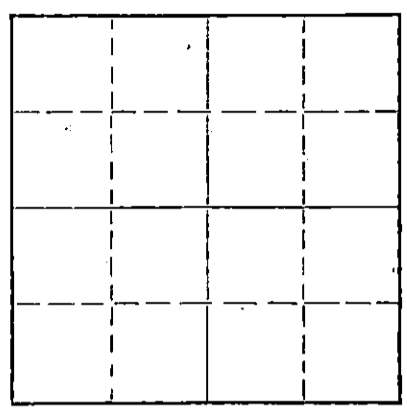

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot.  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3848 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	982'	None
				5-1/2"	3844'	2017'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 3848', ran sand to 3830' and dumped 5 sacks of cement @ 3830' with dump bailer. Pulled 5 1/2" casing. Filled surface pipe from 300' to base of cellar with ready-mix cement.

PLUGGING COMPLETE.

7-24-61  
**RECEIVED**  
STATE CORPORATION COMMISSION  
JUL 24 1961

Name of Plugging Contractor Knight Casing Pulling Company (If additional description is necessary, use BACK of this sheet)  
Address Chase, Kansas CONSERVATION DIVISION  
Wichita, Kansas

STATE OF Kansas COUNTY OF Rice, ss.  
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 19 61

My commission expires May 20, 1964 Milton J. Volin Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

15 45 01097.0000 1


COPY

Company- ROCKET DRILLING CO.  
Farm- Peterson No. 1

SEC. 4 T. 22 R. 16W  
NE NE NW

Total Depth. 3848  
Comm. 3-18-56 Comp. 3-27-56  
Shot or Treated.  
Contractor. Rocket Dr.Lg.  
Issued. 6-16-56

County Pawnee KANSAS



CASING:  
8 5/8" 982' cem w/125 sx  
5 1/2" 3844 1/2' cem w/120 sx

Elevation 1995' DE

Production. 42 BOPD & NW  
in 24 hrs.

Figures indicate Bottom of Formations.

sand & clay	75
clay & shale	340
sand	350
shale	418
sand	610
red shale	974
anhydrite	1005
shale & shells	1555
shale	1850
salt & lime	2005
sand	2015
lime	2080
sand	2090
lime	2175
sand	2190
lime	2320
lim & shale	2770
shale & lime	2930
lime & shale	3407
shale & lime	3552
Lansing-K.C.	3648
lime	3848
Total Depth.	

Tops:

Anhydrite (Driller)	974
Heekner Shale	3400
Brown Lime	3499
Lansing-Kansas City	3507
Base Kansas City	3755
Marmaton Lime	3766
Pennsylvanian Basal Conglomerate	3818
Simpson	3824
Arbuckle	3844