


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Harvey (Harvey) County. Sec. 20 Twp. 22S Rge. 3 W(E) (W)

Location as "NE/CNWSW" or footage from lines NW NW
 Lease Owner OILFIELD SUPPLY & TRADING INC.
 Lease Name Friesen Well No. 1C
 Office Address 430 Greenwood
 Character of Well (completed as Oil, Gas or Dry Hole) Oil
 Date well completed 19____
 Application for plugging filed 19____
 Application for plugging approved 19____
 Plugging commenced 12/4/74 19____
 Plugging completed 12/10/74 19____
 Reason for abandonment of well or producing formation Depleted

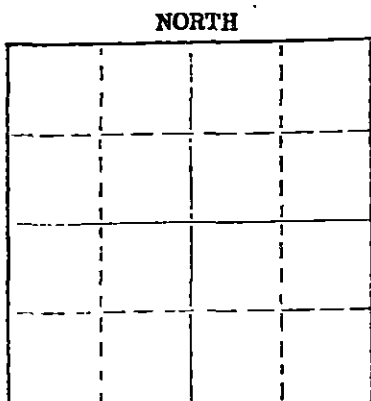

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well HUGH SCOTT
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3641 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

SAND BACK TO 3600' & DUMP 5 SAX OF CEMENT. SHOT CASING OFF AT 2572'

LAY DOWN 2572' OF 5 1/2" CASING. WITH COMPANY PUMP SPOT 3 SAX HULLS, 20 SAX GEL and 75 SAX CEMENT. HAD 300# PRESSURE AT END OF PLUGGING.

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor DUNBAR DRILLING INC.
 Address 5252 North Broadway, Wichita, Kansas 67219

STATE OF Kansas COUNTY OF Sedgwick ss.
 W. P. Simmons (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. P. Simmons *W. P. Simmons*
 5252 No. Brdwy. Wichita, Kns. 67219

SUBSCRIBED AND SWORN TO before me this 7th day of January 19 75

My commission expires November 19, 1977

Frances J. Simmons
 Frances J. Simmons Notary Public.

RECEIVED
 STATE CORPORATION COMMISSION

144 8 1975 1-8-75

CONSERVATION DIVISION
 Wichita, Kansas

WELL LOG

Operator Oilfield Supply & Trading Inc.
 Comm _____ Comp _____
 Shot _____ Qts. From _____ ft. To _____ ft.
 Acidized _____ Gal. _____
 Prod. Formation _____
 Initial Prod. _____
 Elevation _____

Lease Friesen Well No. 1-C
 Loc NE NW NW Sec 20 Twp 32 Rge 3W
 County Harvey State Kansas
 Contractor Triangle Drilling Co.

Casing Record			
Size	Ft.	Pulled	Remarks
<u>3 7/8</u>	<u>521</u>	<u>425</u>	<u>Seal Cement</u>
<u>5 1/2</u>	<u>3641</u>	<u>200</u>	<u>Seal Cement</u>

FIGURES INDICATE BOTTOM OF FORMATION

0	-----	150	Sand
150	-----	450	Lime and shale
450	-----	521	Lime
521	-----	1163	Lime
1163	-----	2148	Lime and Shale
2148	-----	2265	Lime
2265	-----	2495	Shale
2495	-----	2600	Lime
2600	-----	2936	Lime K. C.
2936	-----	3160	Lime and Shale
3160	-----	3287	Lime Miss.
3287	-----	3365	Shale Kinderhook
3365	-----	3396	Shale
3396	-----	3477	Shale
3477	-----	3603	Hunton
3603	-----	3626	Viola
3626	-----	3641	Simpson R. T. D.

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 15 1974
 CONSERVATION DIVISION
 Wichita, Kansas

Perforated 3460-3471 16 Holes