

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-155-21610-00-00
Spot: NENENWNE Sec/Twnshp/Rge: 31-24S-8W
325 feet from N Section Line, 1600 feet from E Section Line
Lease Name: KNOCHE TRUST 2408 Well #: 31-1
County: RENO Total Vertical Depth: 4982 feet

Operator License No.: 35053
Op Name: TAPSTONE ENERGY, LLC
Address: PO BOX 1608
OKLAHOMA CITY, OK 73101

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	18	60		42 SX
	11	7		4286
PROD	7			4286
				320 SX
SURF	9.625			345
				270 SX
	T1	3.5		4234

Well Type: SWD UIC Docket No: D31942.0 Date/Time to Plug:
Plug Co. License No.: 35086 Plug Co. Name: SJL WELL SERVICE, LLC
Proposal Rcvd. from: LARRY SETTLE Company: Phone: (620) 840-2368

Proposed Plugging Method: PER KCC RULES & REGS

Plugging Proposal Received By: B. J. HOPE Witness Type: PARTIAL
Date/Time Plugging Completed: 04/11/2017 11:30 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

Perfs:


SET CIBP AT 4240'. LOAD HOLE WITH MUD & SPOTTED 7 SX CEMENT ON BP. RECOVERED CASING FROM 1250'. PERF'D CASING AT 1400' 4 HOLE. RAN TUBING TO 1450' & SPOTTED 100 SX CEMENT. TAGGED CEMENT 1190'. RAN TUBING TO 750' & SPOTTED 50 SX CEMENT. PULLED TUBING TO 390'. CIRCULATE WITH 143 SKS CEMENT.

Remarks: BASIC CEMENT. COMMON CEMENT. 3% CACL

Plugged through: TBG

District: 02

Signed

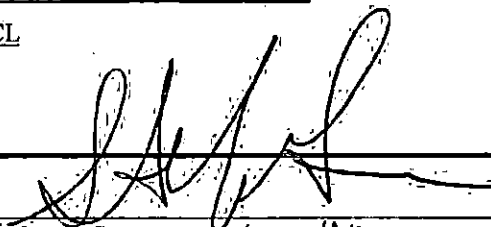

(TECHNICIAN) DATED

APR 19 2017