
Form CP-3 Rev. 6-26-62

KANSAS STATE CORPORATION COMMISSION

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

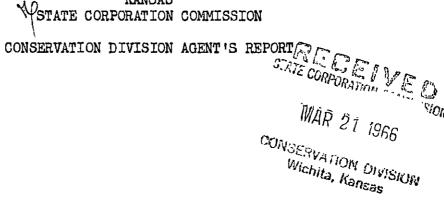

| THE BE |
|--|
| Operator's Full Name Petroleum, Inc., c/o Pipe Pullers, Inc. |
| Complete Address: Box 486, Ellinwood, Kansas |
| Lease Name Strobel(Smallwood Lan-KC Unit # 2-2)Well No. # 2 |
| Location NW SW NW Sec. 2 Twp. 22 Rge. 14 (E) (W)W |
| County Stafford Total Depth 3683 |
| Abandoned Oil Well X Gas Well Input Well SWD Well D & A |
| Other well as hereafter indicated: |
| Plugging Contractor: Pipe Pullers, Inc. |
| Address: Box 486, Ellinwood, Kansas License No. 462 |
| Operation Completed: Hourl1:30AM Day 18th Month March Year 1966 |
| The Above well was plugged as follows: |
| 340' of 8 5/8" surface pipe, cement circulated. 3680' of 51 long string, |
| cemented with 150 sacks. Plug back T.D. 3663'. Top perferation 3564'. Botto |
| of the hole was sanded to 3550', and cemented with 5 sacks. 2716' of $5\frac{1}{2}$ " |
| long string was recovered from the hole. Bridge plug was pushed in fluid to |
| 300', rock bridge from 300' to 290'. 4 sacks of cement was mixed in a barre |
| and put on plug at 290', through the dump bailer, and let set over-night. |
| Next day hole was bailed dry and 21 sacks of cement was added to the plug. Hole was filled with mud to 40', rook bridge from 40' to 30', and cemented with 10 sacks to the base of the cellar. |
| I hereby certify that the above well was plugged as herein stated. |
| NVOICED Signed: Culius Elving Well Plugging Supervisor |
| DATE |
| INV. NO 3902-w |