


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Stafford County. Sec. 2 Twp. 22 Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines NE NE SE
Lease Owner Westgate-Greenland Oil Company
Lease Name Wetig Well No. 6
Office Address 1009 Central Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed November 17, 1952 19
Application for plugging filed November 17, 1952 (orally) 19
Application for plugging approved November 17, 1952 (orally) 19
Plugging commenced November 18, 1952 19
Plugging completed November 18, 1952 19
Reason for abandonment of well or producing formation

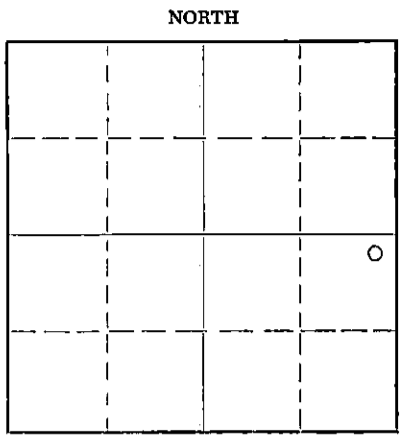

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS, OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface		0	337	10 3/4"	337	none



Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Filled hole with heavy mud from 3865 to 300 feet
Set plug at 300 feet and ran 20 sacks cement to 260 feet
Filled with heavy mud from 260 feet to 30 feet
Ran 10 sacks cement from 30 feet to cellar.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Westgate Drilling Corporation
Address 1009 Central Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
G. E. Bitler (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. E. Bitler
1009 Central Building, Wichita 2, Kans (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of November 19 52 11-22-52
My commission expires May 25, 1953.

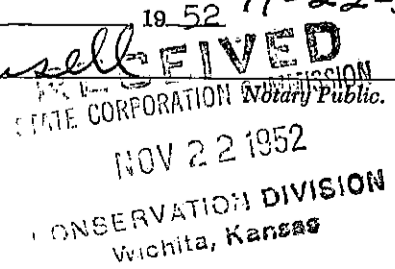

DRILLER'S LOG

COMPANY: Westgate-Greenland Oil Company
 CONTRACTOR: Westgate Drilling Corporation
 FARM: Wetig #6
 LOCATION: NE NE SE Section 2-22S-14W,
 Stafford County, Kansas
 COMMENCED: November 6, 1952
 COMPLETED: November 18, 1952
 ELEVATION: 1933 DF

0	to	300	Shale and sand
300	to	337	Shale
337	to	570	Red bed, shale and sand
570	to	810	Red bed
810	to	843	Anhydrite
843	to	1275	Shale and shells
1275	to	1410	Shale W/salt
1410	to	1500	Shale and shells
1500	to	1850	Lime and shale
1850	to	2130	Lime
2130	to	3420	Shale and lime
3420	to	3427	Shale
3427	to	3663	Lime
3663	to	3689	Shale and lime
3689	to	3795	Lime and chert
3795	to	3865	Shale & Arbuckle
		3865	T. D. (RB)

Set 337 feet of 10 3/4" surface. Cemented with 225 sacks cement and 3 sacks calcium chloride.

TOPS: Anhydrite 810 Lansing 3425 Viola 3724
 Heebner 3290 Base KC 3670 Simpson 3793
 Brown Ls 3417 Cherty Cong 3698 Arbuckle 3842

Drill Stem Test: 3545-63, open 1 hour, 8' mud, no BHP.

Did not run Schlumberger

DRY, PLUGGED AND ABANDONED

_ _ C E R T I F I C A T E _ _


I, Don Allen, do hereby certify that the above and foregoing is a true and correct copy of the log of the Wetig #6, NE NE SE Section 2-22S-14W, Stafford County, Kansas, as reflected by files of the Westgate Drilling Corporation.

Don Allen
 Don Allen

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas, this 20th day of November, 1952.

Esther Unsell
 Esther Unsell, Notary Public

My commission expires Pay 25, 1953.

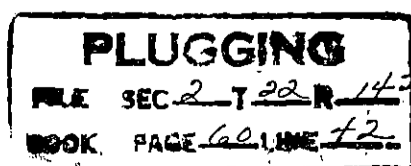

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 22 1952
 CONSERVATION DIVISION
 Wichita, Kansas